




# Ice storage and transport system

with gravity dispense cart loading

Gravity ice dispense eliminates scooping

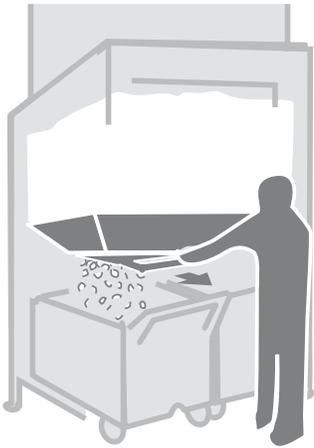

## Features

Designed with speed, safety and sanitation in mind

- elevated ice storage bin uses gravity to dispense ice through a chute 15 times faster than scooping
- one pull of the shutter door handle fills the SmartCART™ 240 ice cart with 200 lb (91 kg) of ice without any hand contact
- dispensing directly into cart eliminates scooping by hand to help prevent cross-contamination
- cart reduces the risk of back injuries by eliminating carrying containers of ice
- optional Totes™ ice carriers may be ordered – SmartCART 240 will hold 6 Totes for use in applications where the ice needs to be lifted out of the SmartCART 240
- industry exclusive SmartGATE® ice shield controls the flow of ice to reduce spills and limit contact with ice

Fresher ice

- first ice in is first ice out

Ice compatibility

- Compatible with cube ice, flake ice and customer preferred Chewblet® ice

Durable, user friendly construction

- full stainless bin exterior and base
- corrosion-resistant poly bin liner and custom-cut stainless steel top
- heavy duty “stay-open” PowerHinge™ door hinge – easy one hand open and close without door catches

SmartCART 240 insulated all-poly carts

- cart drains to bin system when parked in bay

Warranty

- 5 years parts and labor on cabinet exterior, includes top and trim, interior liner, and all other integral components
- visit [follettice.com](http://follettice.com) for complete warranty details

Includes:

- one, two or three SmartCART 240 ice transport cart(s) depending on model
- paddle with hanging bracket

## Accessories

Set of 6 Totes ice carriers (Totes not standard)  
(item# ABICETOTP)

Additional carts and accessories (refer to form# 8590)

Follett Europe Polska Sp. z o.o.  
Mokry Dwór 26C 83-021 Wiślina, Poland  
+48 (58) 785-6140 | Fax: +48 (58) 785-6159  
[folletteurope.com](http://folletteurope.com)

801 Church Lane | Easton, PA 18040, USA  
1.610.252.7301 | Fax: +1.610.250.0696 | [follettice.com](http://follettice.com)

**FOLLETT**®


## Specification

Maximum bin capacity <sup>1</sup>	see model table below
<b>W1</b> Bin width	see model table below
<b>D1</b> Bin depth <sup>2</sup>	40.00" (101.6 cm)
<b>D2</b> Bin depth with door closed	48.00" (121.9 cm)
<b>D3</b> Bin depth with door fully extended	58.50" (148.6 cm)
<b>H1</b> Bin height (adjustable) <sup>3</sup>	see model table below
<b>H2</b> Bin base height (adjustable)	38.75" (98.4 cm)
Required door access <sup>4</sup>	see model table below
<b>W2</b> Cart width	24.50" (62.2 cm)
<b>D4</b> Cart depth	41.50" (105.4 cm)
<b>H4</b> Cart height at front edge	35.83" (91.0 cm)
<b>H5</b> Cart height at rear edge	28.74" (73.0 cm)
<b>W3</b> Tote width	15.62" (39.7 cm)
<b>D5</b> Tote depth	7.12" (18.08 cm)
<b>H6</b> Tote height	15.00" (38.1 cm)
<b>C1</b> Drain <sup>5</sup>	1.25" ID PVC female slip fit (reversible to opposite side)
Dispense rate	up to 5 lb (2.3 kg) per second
Ice compatibility	cube ice, flake ice and Chewblet ice
Shipping weight	see model table below

NOTE: For indoor use only

SHORT FORM SPECIFICATION: Ice transport system to be Follett model \_\_\_\_\_ equipped with SmartCART 240 ice transport cart(s). Elevated bin to hold approximately \_\_\_\_\_ lb (kg) of ice. Exterior of bin and base to be full stainless steel. All bins (except ITS500NS) to have polyethylene ice access door assembly, polyethylene lift door with PowerHinge door hinge, and SmartGATE ice shield. Stainless steel bin top to be custom-cut for ice machine(s) to be used. Bin liner walls to be of non-corroding polyethylene and insulated with CARB compliant non-HFC foam. Bin hopper to be of polyethylene with extra large opening(s) to facilitate ice flow. Base to have built-in drains for bins and carts, and insulated drain troughs, shutter door, and drain to minimize condensation. Cart(s) to be of insulated one-piece molded polyethylene, with plastic lid, four heavy-duty casters (two swivel with one step-on lock and two non-swivel). Carts and optional Totes ice carriers to store below bin when not in use and to drain when positioned in bay. All models to have adjustable flanged feet and paddle. NSF listed.

## Dimensional drawing

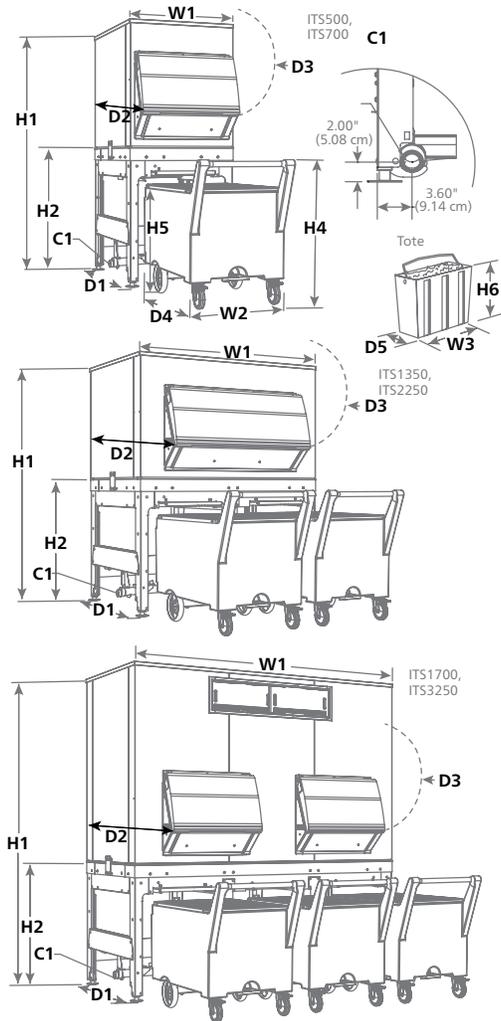

POWERHINGE, SMARTCART and TOTES are trademarks of Follett Products, LLC. CHEWBLETT, FOLLETT and SMARTGATE are registered trademarks of Follett Products, LLC, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

Model	Number of carts	Maximum bin capacity <sup>1</sup> lb (kg)	Maximum capacity with cart(s) <sup>6</sup> lb (kg)	Cubic volume cu ft (m)	Width - <b>W1</b> in (cm)	Height <sup>3</sup> - <b>H1</b> in (cm)	Required door access <sup>4</sup> in (cm)	Approximate ship weight lb (kg)
ITS500NS-31 <sup>7</sup>	1	382 (174)	622 (283)	12.70 (0.36)	31.00 (78.7)	60.00 (152.4)	32.00 (81.3)	371 (169)
ITS700SG-31	1	652 (296)	892 (405)	21.70 (0.61)	31.00 (78.7)	75.00 (190.5)	32.00 (81.3)	398 (181)
ITS1350SG-60	2	1327 (603)	1567 (712)	44.20 (1.25)	60.00 (152.4)	75.00 (190.5)	41.00 (104.1)	712 (323)
ITS2250SG-60	2	2133 (968)	2373 (1077)	71.10 (2.01)	60.00 (152.4)	97.00 (246.4)	41.00 (104.1)	822 (373)
ITS1700SG-90	3	1716 (779)	1986 (901)	58.20 (1.65)	90.00 (228.6)	70.00 (177.8)	41.00 (104.1)	978 (444)
ITS3250SG-90	3	3255 (1477)	3495 (1586)	108.50 (3.07)	90.00 (228.6)	97.00 (246.4)	41.00 (104.1)	1145 (519)

- Notes:
- <sup>1</sup> Computed on cubic volume of bin. Does not reflect cart capacity or voids that can occur due to pyramiding.
  - <sup>2</sup> Add 8.00" (20.32 cm) to depth (D) for lower door assembly (easily removed for installation access).
  - <sup>3</sup> Special top required for ice machines weighing more than 1000 lb (454 kg). Add 2.12" (5.38 cm) to height. Contact factory.
  - <sup>4</sup> Required clearance for installation access through doors (may require removal of door assembly).
  - <sup>5</sup> Follett recommends installation of a floor drain with grate with all ice storage bins. Consider cart positioning when locating the drain. Clearance required to pull cart from below bin — minimum 42.00" (106.7 cm), optimal 56.00" (142.2 cm).
  - <sup>6</sup> Each cart holds 240 lb (109 kg) without optional Totes ice carriers, 150 lb (68 kg) with Totes ice carriers.
  - <sup>7</sup> ITS500NS-31 has sliding windows only, no SmartGATE shield or poly door.

## Ice storage and transport systems

