
effective 04/01/24















medical-grade refrigerators

medical-grade freezers

ice and water dispensers

ice machines

slope front bins



LIST PRICE SCHEDULE

Contents

TERMS AND POLICIES	5
MEDICAL-GRADE REFRIGERATORS AND FREEZERS Follett authorized installation services 1	
COUNTERTOP REFRIGERATORS. REF1 and REF2 countertop refrigerators. REFVAC2 countertop NSF 456 certified vaccine refrigerators.	8
UNDERCOUNTER REFRIGERATORS REF4P and REF5P Performance Plus undercounter refrigerators REF4P and REF5P Performance Plus undercounter refrigerators with Wi-Fi remote monitoring REFOMN4P and REFOMN5P Performance Plus Omnicell FlexLock-ready undercounter refrigerators REFVAC4P and REFVAC5P Performance Plus undercounter NSF 456 certified vaccine refrigerators. REF5BBP-T Performance Plus undercounter blood bank refrigerators REFNAT5 Edge Series undercounter refrigerators	9 10 10 10
REFADV5-SD Follett Advantage undercounter refrigerator REF3-VAC undercounter refrigerator INFINITY SERIES™ UPRIGHT REFRIGERATORS, VARIABLE SPEED.	11
REF12i, REF20i, REF25i single door upright refrigerators REF12i, REF20i, REF25i with Wi-Fi remote monitoring single door upright refrigerators REF20i and REF25i Omnicell FlexLock-ready single door upright refrigerators REF20i-BB and REF25i-BB blood bank single door upright refrigerators	12 14 15
UPRIGHT REFRIGERATORS, FIXED SPEED REF12-LB single door upright refrigerators for laboratory and pharmacy	
UPRIGHT REFRIGERATORS, FIXED SPEED. REF45-LB/PH double door upright refrigerators for laboratory and pharmacy. REFVAC45 double door upright NSF 456 certified vaccine refrigerators. REF45-BB double door upright refrigerators for blood banks	18 19
COUNTERTOP FREEZERS	. 20
FZR1 and FZR2 countertop freezers	
UNDERCOUNTER FREEZERS FZR4P and FZR5P Performance Plus undercounter freezers FZRVAC4P and FZRVAC5P Performance Plus undercounter NSF 456 certified vaccine freezers FZR5PLP-T Performance Plus undercounter plasma freezer FZRNAT5 Edge Series undercounter freezer	21 22 22
UPRIGHT FREEZERS. FZR20-LB and FZR25-LB single door upright freezers for laboratory and pharmacy FZRVAC20-LB and FZRVAC25-LB single door upright NSF 456 certified vaccine freezers. FZRMD24-30 C single door upright freezer for laboratory. FZR20 and FZR25 single door upright freezers for plasma FZR8-PC plasma chiller. FZRDCMD17 dual chamber biomedical ECO upright freezer	. 23 23 23 24 24
COMBINATION REFRIGERATOR/FREEZER	25 25

ULTRA-LOW CHEST FREEZERS	. 26
FZRC3-80 C ultra-low temperature chest freezer	
ULTRA-LOW UPRIGHT FREEZERS	27
FZR19 -86 C ultra-low temperature VIP ECO upright freezer	
FZR26 -86 C ultra-low temperature VIP ECO upright freezer	
FZR29 -86 C ultra-low temperature VIP ECO upright freezer	
FZRDR13 -86 C ultra-low temperature TwinGuard upright freezer	
FZRDR19 -86 C ultra-low temperature TwinGuard upright freezer	
FZRDR26 -86 C ultra-low temperature TwinGuard upright freezer	
CRYOGENIC FREEZERS AND CO2 INCUBATORS	
FZRC8 -150 C cryogenic chest freezer	
CO2INC30 Reach-In CO2 incubator	. 29
REFRIGERATOR AND FREEZER ACCESSORIES	
Countertop refrigerator and freezer accessories and warranties	
Undercounter refrigerator and freezer accessories and warranties	
Upright refrigerator and freezer accessories and warranties	. 31
ICE AND WATER DISPENSERS	
Symphony Plus ice and water dispensers – 12 series	
Symphony Plus ice-only dispensers – 12 series	. 33
Symphony Plus series ice-only dispensers – 25 and 50 series	. 34
Symphony Plus ice and water dispensers with removable ice machine – 110 series	
Symphony Plus manual load ice and water dispensers – 110 series	
Symphony Plus ice-only dispensers – 110 series	
Symphony Plus base stand options	. 37
ICE AND WATER DISPENSER ACCESSORIES	. 37
Water treatment accessories for Symphony Plus ice and water dispensers	
Cleaning and sanitizing accessories for Symphony Plus ice and water dispensers	
Other accessories for Symphony Plus ice and water dispensers	
Replacement ice machine for use in existing Symphony and Symphony Plus dispensers	
Replacement ice machine ordering matrix	
ICE MACHINES	
Maestro Plus ice machine bins – 400 series	
Maestro Plus Chewblet ice machines for ice storage bins – 400 series	
Maestro Plus Chewblet ice machines for countertop ice and beverage dispensers – 400 series	. 43
Top kits for top mount model Maestro Plus 400 series ice machines used with	
countertop ice and beverage dispensers	. 45
countertop ice and beverage dispensers	
countertop ice and beverage dispensers	. 45
Horizon Elite Chewblet ice machines for ice storage bins – 710 series	
Horizon Elite Chewblet ice machines for countertop ice and beverage dispensers – 710 series	
Top kits for Horizon Elite 710 RIDE ice machines for use with countertop ice and beverage dispensers	
Ice transport tube	. 47
ICE MACHINE ACCESSORIES	
Water treatment accessories for ice machines	
Cleaning and sanitizing accessories for ice machines	
Other accessories for ice machines	

www.folletthealthcare.com APRIL 1, 2024 ■ 3

ICE STORAGE, ICE TRANSPORT AND ICE HANDLING	50
Slope front bins	51
Replacement stainless steel tons for slope front hins	51

4 ■ APRIL 1, 2024 www.folletthealthcare.com

Terms and policies

Terms

- Products for sale meet all regulatory compliances as noted in the appropriate Follett Product Specification Sheet at the time of sale. Customer understands and accepts these products as meeting the designated regulatory compliances.
- Net 30 day terms on approved accounts
- Prices subject to change without notice
- Specifications subject to change without notice
- This price list supersedes all others
- Pricing is in USD
- Products priced with EX Works (EXW) terms
- · Other shipping terms available upon request

Return Policy

Non-standard equipment cannot be returned. Orders for non-standard equipment cannot be cancelled.

Follett equipment may be returned for credit under the following conditions:

- The equipment is new and unused
- A return authorization number has been issued by customer service within 45 days after shipment
- Follett receives the equipment at the factory in Easton, PA within 30 days after issuance of the return authorization number
- The equipment must be returned in Follett packaging. If the packaging has been damaged or discarded, Follett will forward new packaging at the customer's expense.

Note: Return freight charges are the responsibility of the customer. If equipment is returned and is damaged because of improper packaging, Follett Products, LLC will not be held responsible.

Credit will be issued when the equipment has been inspected by Follett and deemed suitable to be returned to stock.

Note: A 20% restocking charge will be deducted from the credit. If the cost to return the product to stock exceeds 20%, the actual cost will be deducted.

www.folletthealthcare.com APRIL 1, 2024 ■ 5



Follett medical-grade refrigerators and freezers provide the consistent, stable temperatures and access security required for patient floor, lab and pharmacy applications. Heavy-duty compressors and powerful forced-air cooling provide exceptional temperature consistency, quick temperature pull down and rapid recovery following door openings.

Warranty

PHCbi co-branded models

Please visit https://www.phchd.com/global/biomedical.

Follett medical-grade countertop, undercounter (Performance Plus and Edge Series[™]) and upright refrigerators and freezers (including Infinity Series[™])

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 2 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 2 year period are covered under this warranty.

The compressor shall be covered for an additional 3 years (parts only), for a total of 5 years from the date of installation.

Follett Advantage* undercounter refrigerators

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 1 year from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 1 year period are covered under this warranty.

FOLLETT WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond the control of Follett are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.

This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship.

Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.

Follett authorized installation services¹

Authorized installation

Equipment is shipped via Follett logistics partner, delivered to customer's facility, and positioned in final customer-designated location by certified technicians. Certified Follett technician will remove and discard all packaging material, install casters, make all electrical connections, and complete set up to ensure the unit is fully operational and ready to be used by customer.

For additional product information and terms and conditions, request form# 8620.

Countertop and undercounter refrigerators and freezers

Item number	Description	Net price
AC1	Authorized installation, first unit	\$350
AS1	Authorized installation, subsequent units of the same model to the same location	\$175





Undercounter

Single door upright refrigerators and freezers


Item number	Description	Net price
463	Authorized installation, first unit	\$500
AS2	Authorized installation, subsequent units of the same model to the same location	\$250



Single door upright

Double door upright refrigerators


Item number	Description	Net price
462	Authorized installation, first unit	\$800
AS3	Authorized installation, subsequent units of the same model to the same location	\$375



Double door upright

¹ Authorized services available only with Follett contracted logistics provider and does not include dock-to-dock common carrier freight charges.

Countertop refrigerators





REF1 and REF2 countertop refrigerators

Medical-grade countertop refrigerators for small storage needs. Forced air, external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.

For additional product information, request form# 6555 for REF1 or 6560 for REF2.

See page 30 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Front access condensate pan	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF1	1.0 (28)	right	no	no	18.60 (47.2)	24.00 (61.0)	17.93 (45.5)	109 (50)	\$4,480
REF1-KP	1.0 (28)	right	yes	no	18.60 (47.2)	24.00 (61.0)	17.93 (45.5)	109 (50)	\$5,255
REF1-PR	1.0 (28)	right	no	yes	18.60 (47.2)	24.00 (61.0)	17.93 (45.5)	109 (50)	\$4,630
REF2	1.8 (51)	right	no	no	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	132 (60)	\$4,770
REF2-KP	1.8 (51)	right	yes	no	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	132 (60)	\$5,545
REF2-PR	1.8 (51)	right	no	yes	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	132 (60)	\$4,920

REFVAC2 countertop NSF 456 certified vaccine refrigerators


Medical-grade countertop NSF/ANSI 456 certified vaccine refrigerators for small storage needs. Forced air, external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.


For additional product information, request form# 9060.


Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Front access condensate pan	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REFVAC2	1.8 (51)	right	no	no	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	132 (60)	\$4,995


Undercounter refrigerators











Performance Plus LED display

Performance Plus 7" LCD touchscreen display

REF3-VAC

Edge Series

Follett Advantage

REF4P and REF5P Performance Plus undercounter refrigerators

Medical-grade undercounter refrigerators, freestanding or stackable, with external temperature display in F or C, integral high/ low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REF4P fits below 34.00" (86.4 cm) ADA-compatible counter and model REF5P fits below a standard 36.00" (91.4 cm) high counter. Ideal for heavy duty applications.

For additional product information, request form# 6455 for REF4P, 6460 for REF5P, 6505 for REF4P-T, or 6510 for REF5P-T.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital tempe	erature display								
REF4P-0R-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$5,600
REF5P-0R-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$5,600
REF4P-0R-00-GD	3.9 (110)	right	no	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,150
REF5P-0R-00-GD	4.5 (127)	right	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,150
REF4P-0R-KP-00	3.9 (110)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,375
REF5P-OR-KP-00	4.5 (127)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,375
REF4P-0R-KP-GD	3.9 (110)	right	yes	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,925
REF5P-0R-KP-GD	4.5 (127)	right	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,925
REF4P-0L-00-00	3.9 (110)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$5,600
REF5P-0L-00-00	4.5 (127)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$5,600
REF4P-0L-00-GD	3.9 (110)	left	no	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,150
REF5P-0L-00-GD	4.5 (127)	left	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,150
REF4P-0L-KP-00	3.9 (110)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,375
REF5P-0L-KP-00	4.5 (127)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,375
REF4P-0L-KP-GD	3.9 (110)	left	yes	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,925
REF5P-OL-KP-GD	4.5 (127)	left	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,925
7" LCD touchscre	en digital tempera	ture display							
REF4P-TR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,145
REF5P-TR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,145
REF4P-TR-00-GD	3.9 (110)	right	no	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,695
REF5P-TR-00-GD	4.5 (127)	right	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,695
REF4P-TR-KP-00	3.9 (110)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,595
REF5P-TR-KP-00	4.5 (127)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,595
REF4P-TR-KP-GD	3.9 (110)	right	yes	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$8,145
REF5P-TR-KP-GD	4.5 (127)	right	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$8,145
REF4P-TL-00-00	3.9 (110)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,145
REF5P-TL-00-00	4.5 (127)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,145
REF4P-TL-00-GD	3.9 (110)	left	no	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,695
REF5P-TL-00-GD	4.5 (127)	left	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,695
REF4P-TL-KP-00	3.9 (110)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,595
REF5P-TL-KP-00	4.5 (127)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,595
REF4P-TL-KP-GD	3.9 (110)	left	yes	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$8,145
REF5P-TL-KP-GD	4.5 (127)	left	ves	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$8,145

REF4P and REF5P Performance Plus undercounter refrigerators with Wi-Fi remote monitoring

Medical-grade, undercounter refrigerators with Wi-Fi based cloud communication functionality for continuous temperature monitoring and remote alarming. Freestanding or stackable with LED control, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REF4P fits below 34.00" (86.4 cm) ADAcompatible counter and model REF5P fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order. Ideal for heavy duty applications.

For additional product information, request form# 9020.

See page 30 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital temperate	ure display								
REF4P-0R-00-00-N	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	Contact factory
REF5P-0R-00-00-N	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	Contact factory
REF4P-0L-00-00-N	3.9 (110)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	Contact factory
REF5P-0L-00-00-N	4.5 (127)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	Contact factory

REFOMN4P and REFOMN5P Performance Plus Omnicell FlexLock-ready undercounter refrigerators

Medical-grade, undercounter refrigerators with pre-drilled holes for installing Omnicell® XT FlexLock Refrigerator Lock and Temperature Monitor (not included). LED control or LCD touchscreen display, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REFOMN4P fits below 34.00" (86.4 cm) ADA-compatible counter and model REFOMN5P fits below a standard 36.00" (91.4 cm) high counter. Ideal for heavy duty applications.

For additional product information, request form# 8970.

See page 30 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital temperate	ure display								
REFOMN4P-0R-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	Contact factory
REFOMN5P-0R-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	Contact factory
7" LCD touchscreen d	igital temperature	e display							
REFOMN4P-TR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	Contact factory
REFOMN5P-TR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	Contact factory

REFVAC4P and REFVAC5P Performance Plus undercounter NSF 456 certified vaccine refrigerators

Medical-grade undercounter NSF/ANSI 456 certified vaccine refrigerators. Freestanding or stackable, with external temperature display in F or C, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REFVAC4P fits below 34.00" (86.4 cm) ADA-compatible counter and model REFVAC5P fits below a standard 36.00" (91.4 cm) high counter. Ideal for heavy duty applications.

For additional product information, request form# 9055.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital temperat	ure display								
REFVAC4P-0R-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$5,825
REFVAC5P-0R-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$5,825
7" LCD touchscreen d	ligital temperature	e display							
REFVAC4P-TR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,370
REFVAC5P-TR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,380

REF5BBP-T Performance Plus undercounter blood bank refrigerators

Medical-grade, undercounter blood bank refrigerators, freestanding or stackable, with 7" LCD touchscreen user interface with integral data and event logging. Stainless steel construction on interior/exterior with internal LED lighting. 115V/60/1 electrical. For undercounter applications: fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order. Two full extension, stainless drawers standard. Includes separate temperature surveillance module with audible/visual alarm, 7-day chart recorder and digital product temperature display. Meets AABB, FDA, ARC requirements for storage of blood products at 4 C. Ideal for heavy duty applications.

For additional product information, request form# 6475.

See page 30 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Bags (450 ml)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF5BBP-TR-00-00	4.5 (127)	60	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,745
REF5BBP-TR-00-GD	4.5 (127)	60	right	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$11,295
REF5BBP-TR-KP-00	4.5 (127)	60	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$11,195
REF5BBP-TR-KP-GD	4.5 (127)	60	right	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$11,745
REF5BBP-TL-00-00	4.5 (127)	60	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,745
REF5BBP-TL-00-GD	4.5 (127)	60	left	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$11,295
REF5BBP-TL-KP-00	4.5 (127)	60	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$11,195
REF5BBP-TL-KP-GD	4.5 (127)	60	left	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$11,745

REFNAT5 Edge Series undercounter refrigerators

Medical-grade undercounter refrigerators with LED control, right-hinged door available in solid steel or dual-pane glass and electro galvanized steel, painted steel exterior, preset automatic alarm tracking around set point, 3 coated steel wire shelves, variable speed compressor, R600a natural refrigerant. 115V/60/1 electrical. Fits below standard 36.00" (91.4 cm) counter. Ideal for medium to heavy duty applications.

For additional product information, request form# 9045.

See page 30 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	Net price
REFNAT5-SD	5.0 (142 L)	right	no	steel	23.84 (60.6)	24.50" (62.2)	34.10 (86.6)	130 (59)	\$1,840
REFNAT5-GD	5.0 (142 L)	right	no	glass	23.84 (60.6)	24.50" (62.2)	34.10 (86.6)	136 (62)	\$2,070

REFADV5-SD Follett Advantage undercounter refrigerator

Medical-grade undercounter refrigerator with LED control, right-hinged painted steel door, audible and visual high/low temperature alarms, 2 adjustable wire shelves. 115V/60/1 electrical. Fits below 34.00" (86.4 cm) ADA-compatible counter. Ideal for light to medium duty applications.

For additional product information, request form# 8455.

See page 30 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	Net price
REFADV5-SD	4.7 (132 L)	right	no	painted steel	23.30 (59.2)	25.40 (64.5)	31.93 (81.1)	120 (54)	\$930

REF3-VAC undercounter refrigerator

PHCbi brand high performance undercounter vaccine refrigerator, 3.0 cu ft capacity, +2 C to +8 C temperature range, glass door, 2 adjustable shelves, microprocessor controller with touchpad display. High/low temperature, power failure and door alarming. 115/60 electrical. ADA compliant. ENERGY STAR® certified.

For additional product information, request form# 12603.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	Net price
REF3-VAC	3.0 (85)	right	no	glass	22.50 (57.2)	22.10 (56.2)	29.60 (75.1)	120 (54)	\$1,875

Infinity Series™ upright refrigerators, variable speed









REF12i, REF20i, REF25i single door upright refrigerators

Infinity Series upright refrigerator with variable capacity compressor, LCD touchscreen user interface, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Interchangeable storage options allow the interior cabinet space to be configured with shelves, baskets or drawers to your exact needs. Certified to meet NSF/ANSI 456 standard for vaccine storage.

For additional product information, request form# 1027.

Item number	Cubic capacity cu ft (L)	Vaccine storage capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF12i-4S-R00G	12.0 (340)	7.2 (204)	4 shelves	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-R0000G	19.7 (558)	12.7 (360)	4 shelves	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-R0000G	24.6 (697)	16.8 (476)	4 shelves	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF12i-4S-R00S	12.0 (340)	7.2 (204)	4 shelves	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-R0000S	19.7 (558)	12.7 (360)	4 shelves	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-R0000S	24.6 (697)	16.8 (476)	4 shelves	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF20i-4S-R00KPG	19.7 (558)	12.7 (360)	4 shelves	right	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-R00KPG	24.6 (697)	16.8 (476)	4 shelves	right	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF20i-4S-R00KPS	19.7 (558)	12.7 (360)	4 shelves	right	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-R00KPS	24.6 (697)	16.8 (476)	4 shelves	right	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF20i-4S-RHT00G	19.7 (558)	12.7 (360)	4 shelves	right	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-RHT00G	24.6 (697)	16.8 (476)	4 shelves	right	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF20i-4S-RHTKPG	19.7 (558)	12.7 (360)	4 shelves	right	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-RHTKPG	24.6 (697)	16.8 (476)	4 shelves	right	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF12i-4S-L00G	12.0 (340)	7.2 (204)	4 shelves	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-L0000G	19.7 (558)	12.7 (360)	4 shelves	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-L0000G	24.6 (697)	16.8 (476)	4 shelves	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF12i-4S-L00S	12.0 (340)	7.2 (204)	4 shelves	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-L0000S	19.7 (558)	12.7 (360)	4 shelves	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-L0000S	24.6 (697)	16.8 (476)	4 shelves	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF20i-4S-L00KPG	19.7 (558)	12.7 (360)	4 shelves	left	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-L00KPG	24.6 (697)	16.8 (476)	4 shelves	left	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF20i-4S-L00KPS	19.7 (558)	12.7 (360)	4 shelves	left	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-L00KPS	24.6 (697)	16.8 (476)	4 shelves	left	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF20i-4S-LHT00G	19.7 (558)	12.7 (360)	4 shelves	left	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-LHT00G	24.6 (697)	16.8 (476)	4 shelves	left	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF20i-4S-LHTKPG	19.7 (558)	12.7 (360)	4 shelves	left	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-LHTKPG	24.6 (697)	16.8 (476)	4 shelves	left	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory

Item number	Cubic capacity cu ft (L)	Vaccine storage capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF12i-5B-R00G	12.0 (340)	7.6 (215)	5 baskets	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-R0000G	19.7 (558)	12.8 (362)	6 baskets	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)		Contact factory
REF25i-6B-R0000G	24.6 (697)	16.4 (464)	6 baskets	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF12i-5B-R00S	12.0 (340)	7.6 (215)	5 baskets	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-R0000S	19.7 (558)	12.8 (362)	6 baskets	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)		Contact factory
REF25i-6B-R0000S	24.6 (697)	16.4 (464)	6 baskets	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF20i-6B-R00KPG	19.7 (558)	12.8 (362)	6 baskets	right	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-R00KPG	24.6 (697)	16.4 (464)	6 baskets	right	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF20i-6B-R00KPS	19.7 (558)	12.8 (362)	6 baskets	right	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-R00KPS	24.6 (697)	16.4 (464)	6 baskets	right	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF20i-6B-RHT00G	19.7 (558)	12.8 (362)	6 baskets	right	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-RHT00G	24.6 (697)	16.4 (464)	6 baskets	right	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF20i-6B-RHTKPG	19.7 (558)	12.8 (362)	6 baskets	right	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-RHTKPG	24.6 (697)	16.4 (464)	6 baskets	right	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF12i-5B-L00G	12.0 (340)	7.6 (215)	5 baskets	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-L0000G	19.7 (558)	12.8 (362)	6 baskets	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-L0000G	24.6 (697)	16.4 (464)	6 baskets	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF12i-5B-L00S	12.0 (340)	7.6 (215)	5 baskets	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-L0000S	19.7 (558)	12.8 (362)	6 baskets	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-L0000S	24.6 (697)	16.4 (464)	6 baskets	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF20i-6B-L00KPG	19.7 (558)	12.8 (362)	6 baskets	left	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-L00KPG	24.6 (697)	16.4 (464)	6 baskets	left	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF20i-6B-L00KPS	19.7 (558)	12.8 (362)	6 baskets	left	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-L00KPS	24.6 (697)	16.4 (464)	6 baskets	left	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF20i-6B-LHT00G	19.7 (558)	12.8 (362)	6 baskets	left	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-LHT00G	24.6 (697)	16.4 (464)	6 baskets	left	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF20i-6B-LHTKPG	19.7 (558)	12.8 (362)	6 baskets	left	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-LHTKPG	24.6 (697)	16.4 (464)	6 baskets	left	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF12i-5D-R00G	12.0 (340)	7.5 (212)	5 drawers	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6D-R0000G	19.7 (558)	13.8 (391)	6 drawers	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-6D-R0000G	24.6 (697)	18.2 (515)	6 drawers	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory
REF12i-5D-R00S	12.0 (340)	7.5 (212)	5 drawers	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6D-R0000S	19.7 (558)	13.8 (391)	6 drawers	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-6D-R0000S	24.6 (697)	18.2 (515)	6 drawers	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory
REF12i-5D-L00G	12.0 (340)	7.5 (212)	5 drawers	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6D-L0000G	19.7 (558)	13.8 (391)	6 drawers	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-6D-L0000G	24.6 (697)	18.2 (515)	6 drawers	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory
REF12i-5D-L00S	12.0 (340)	7.5 (212)	5 drawers	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6D-L0000S	19.7 (558)	13.8 (391)	6 drawers	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-6D-L0000S	24.6 (697)	18.2 (515)	6 drawers	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory

REF12i, REF20i, REF25i with Wi-Fi remote monitoring single door upright refrigerators

Infinity Series upright refrigerators with variable capacity compressor, Wi-Fi based cloud communication functionality, LCD touchscreen user interface, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, userprogrammable temperature display and integral alarming functions, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Interchangeable storage options allow the interior cabinet space to be configured with shelves, baskets or drawers to your exact needs. Certified to meet NSF/ANSI 456 standard for vaccine storage.

For additional product information, request form# 1027.

Item number	Cubic capacity cu ft (L)	Vaccine storage capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF12i-4S-R00GN	12.0 (340)	7.2 (204)	4 shelves	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-R0000GN	19.7 (558)	12.7 (360)	4 shelves	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-R0000GN	24.6 (697)	16.8 (476)	4 shelves	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF12i-4S-R00SN	12.0 (340)	7.2 (204)	4 shelves	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-R0000SN	19.7 (558)	12.7 (360)	4 shelves	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-R0000SN	24.6 (697)	16.8 (476)	4 shelves	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF12i-4S-L00GN	12.0 (340)	7.2 (204)	4 shelves	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-L0000GN	19.7 (558)	12.7 (360)	4 shelves	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-L0000GN	24.6 (697)	16.8 (476)	4 shelves	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF12i-4S-L00SN	12.0 (340)	7.2 (204)	4 shelves	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-L0000SN	19.7 (558)	12.7 (360)	4 shelves	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REF25i-4S-L0000SN	24.6 (697)	16.8 (476)	4 shelves	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REF12i-5B-R00GN	12.0 (340)	7.6 (215)	5 baskets	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-R0000GN	19.7 (558)	12.8 (362)	6 baskets	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-R0000GN	24.6 (697)	16.4 (464)	6 baskets	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF12i-5B-R00SN	12.0 (340)	7.6 (215)	5 baskets	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-R0000SN	19.7 (558)	12.8 (362)	6 baskets	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-R0000SN	24.6 (697)	16.4 (464)	6 baskets	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF12i-5B-L00GN	12.0 (340)	7.6 (215)	5 baskets	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-L0000GN	19.7 (558)	12.8 (362)	6 baskets	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-L0000GN	24.6 (697)	16.4 (464)	6 baskets	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF12i-5B-L00SN	12.0 (340)	7.6 (215)	5 baskets	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-L0000SN	19.7 (558)	12.8 (362)	6 baskets	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REF25i-6B-L0000SN	24.6 (697)	16.4 (464)	6 baskets	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REF12i-5D-R00GN	12.0 (340)	7.5 (212)	5 drawers	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF12i-5D-R00SN	12.0 (340)	7.5 (212)	5 drawers	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF12i-5D-L00GN	12.0 (340)	7.5 (212)	5 drawers	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF12i-5D-L00SN	12.0 (340)	7.5 (212)	5 drawers	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory

REF20i and REF25i Omnicell FlexLock-ready single door upright refrigerators

Infinity Series upright refrigerators designed for installation of Omnicell® XT FlexLock Refrigerator Lock and Temperature Monitor, with variable capacity compressor, LCD touchscreen user interface, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Interchangeable storage options allow the interior cabinet space to be configured with shelves, baskets or drawers to your exact needs. Certified to meet NSF/ANSI 456 standard for vaccine storage.

For additional product information, request form# 1027.

Item number	Cubic capacity cu ft (L)	Vaccine storage capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REFOMN12i-4S-R00G	12.0 (340)	7.2 (204)	4 shelves	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN20i-4S-R0000G	19.7 (558)	12.7 (360)	4 shelves	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REFOMN25i-4S-R0000G	24.6 (697)	16.8 (476)	4 shelves	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REFOMN12i-4S-R00S	12.0 (340)	7.2 (204)	4 shelves	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-4S-L00G	12.0 (340)	7.2 (204)	4 shelves	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN20i-4S-L0000G	19.7 (558)	12.7 (360)	4 shelves	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	431 (196)	Contact factory
REFOMN25i-4S-L0000G	24.6 (697)	16.8 (476)	4 shelves	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	477 (217)	Contact factory
REFOMN12i-4S-L00S	12.0 (340)	7.2 (204)	4 shelves	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5B-R00G	12.0 (340)	7.6 (215)	5 baskets	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN20i-6B-R0000G	19.7 (558)	12.8 (362)	6 baskets	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REFOMN25i-6B-R0000G	24.6 (697)	16.4 (464)	6 baskets	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REFOMN12i-5B-R00S	12.0 (340)	7.6 (215)	5 baskets	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5B-L00G	12.0 (340)	7.6 (215)	5 baskets	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN20i-6B-L0000G	19.7 (558)	12.8 (362)	6 baskets	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	489 (222)	Contact factory
REFOMN25i-6B-L0000G	24.6 (697)	16.4 (464)	6 baskets	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	467 (212)	Contact factory
REFOMN12i-5B-L00S	12.0 (340)	7.6 (215)	5 baskets	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5D-R00G	12.0 (340)	7.5 (212)	5 drawers	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5D-R00S	12.0 (340)	7.5 (212)	5 drawers	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5D-L00G	12.0 (340)	7.5 (212)	5 drawers	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5D-L00S	12.0 (340)	7.5 (212)	5 drawers	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory

REF20i-BB and REF25i-BB blood bank single door upright refrigerators

Infinity Series upright refrigerators with variable capacity compressor, LCD touchscreen user interface, six full-extension stainless steel drawers, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, integral 6.00" (15.24 cm) 7-day chart recorder standard with 50 Celsius charts, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Meets AABB, ARC and FDA standards for blood storage at 4 C.

For additional product information, request form# 1028.


Item number	Cubic capacity cu ft (L)	Bags (450 ml)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF20i-BB-R0000G	19.7 (558)	312	6 drawers	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-BB-R0000G	24.6 (697)	432	6 drawers	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory
REF20i-BB-R00KPG	19.7 (558)	312	6 drawers	right	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-BB-R00KPG	24.6 (697)	432	6 drawers	right	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory
REF20i-BB-RHT00G	19.7 (558)	312	6 drawers	right	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-BB-RHT00G	24.6 (697)	432	6 drawers	right	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory
REF20i-BB-RHTKPG	19.7 (558)	312	6 drawers	right	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-BB-RHTKPG	24.6 (697)	432	6 drawers	right	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory
REF20i-BB-L0000G	19.7 (558)	312	6 drawers	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-BB-L0000G	24.6 (697)	432	6 drawers	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory
REF20i-BB-L00KPG	19.7 (558)	312	6 drawers	left	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-BB-L00KPG	24.6 (697)	432	6 drawers	left	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory
REF20i-BB-LHT00G	19.7 (558)	312	6 drawers	left	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-BB-LHT00G	24.6 (697)	432	6 drawers	left	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory
REF20i-BB-LHTKPG	19.7 (558)	312	6 drawers	left	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	519 (236)	Contact factory
REF25i-BB-LHTKPG	24.6 (697)	432	6 drawers	left	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	541 (246)	Contact factory

Upright refrigerators, fixed speed

REF12-LB single door upright refrigerators for laboratory and pharmacy

Medical-grade laboratory and pharmacy refrigerators for critical product storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged or left-hinged self-closing doors available in full-view, double pane glass with Low-E coating or solid stainless steel – must be specified at time of order. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves.


For additional product information, request form# 8545.



REF12-LB

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt Ib (kg)	List price
REF12-LB-R00G	11.8 (334)	4 shelves	right	glass	no	no	23.62 (60.0)	27.25 (69.2)	72.75 (184.8)	420 (191)	Contact factory
REF12-LB-R00S	11.8 (334)	4 shelves	right	stainless	no	no	23.62 (60.0)	27.25 (69.2)	72.75 (184.8)	420 (191)	Contact factory
RFF12-I R-I 00G	11.8 (334)	4 shelves	left	alass	no	no	23.62 (60.0)	27 25 (69 2)	72 75 (184 8)	420 (191)	Contact factory

Upright refrigerators, fixed speed

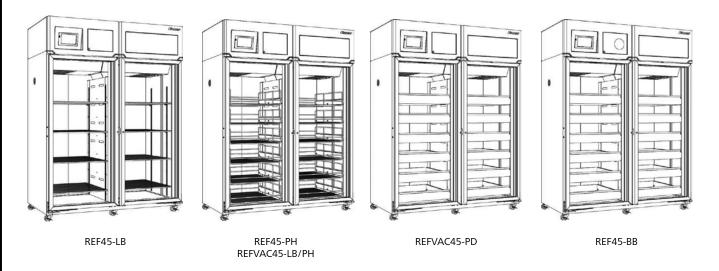

REF45-LB/PH double door upright refrigerators for laboratory and pharmacy

Medical-grade laboratory and pharmacy refrigerators for critical product storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged, left-hinged or outer-hinged self-closing doors available in full-view, double pane glass with Low-E coating or solid stainless steel – must be specified at time of order. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 8 epoxy-coated shelves, 12 roll-out baskets or 12 full-extension stainless steel drawers.

For additional product information, request form# 8150 for REF45-LB, 8155 for REF45-PH, or 8595 for REF45-PD.

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF45-LB-R0000G	45.0 (1274)	8 shelves	right	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-L0000G	45.0 (1274)	8 shelves	left	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-00000G	45.0 (1274)	8 shelves	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-R0000S	45.0 (1274)	8 shelves	right	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-L0000S	45.0 (1274)	8 shelves	left	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-00000S	45.0 (1274)	8 shelves	outer	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-000KPG	45.0 (1274)	8 shelves	outer	glass	no	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-000KPS	45.0 (1274)	8 shelves	outer	stainless	no	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-RHT00G	45.0 (1274)	8 shelves	right	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-LHT00G	45.0 (1274)	8 shelves	left	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-0HT00G	45.0 (1274)	8 shelves	outer	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-0HTKPG	45.0 (1274)	8 shelves	outer	glass	yes	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-PH-R0000G	45.0 (1274)	12 baskets	right	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-L0000G	45.0 (1274)	12 baskets	left	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-00000G	45.0 (1274)	12 baskets	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-R0000S	45.0 (1274)	12 baskets	right	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-L0000S	45.0 (1274)	12 baskets	left	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-00000S	45.0 (1274)	12 baskets	outer	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-000KPG	45.0 (1274)	12 baskets	outer	glass	no	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-000KPS	45.0 (1274)	12 baskets	outer	stainless	no	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-RHT00G	45.0 (1274)	12 baskets	right	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-LHT00G	45.0 (1274)	12 baskets	left	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-0HT00G	45.0 (1274)	12 baskets	outer	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-0HTKPG	45.0 (1274)	12 baskets	outer	glass	yes	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PD-00000G	45.0 (1274)	12 drawers	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory

REFVAC45 double door upright NSF 456 certified vaccine refrigerators

Medical-grade NSF/ANSI 456 certified refrigerators for vaccine storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Outer hinges, self-closing door in full-view, double pane glass with Low-E coating. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 8 epoxy-coated shelves on REFVAC45-LB models, 12 roll-out baskets on REFVAC45-PH models or 12 stainless steel drawers on REFVAC45-PD models.

For additional product information, request form# 9010.

See page 31 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Storage System	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REFVAC45-LB-00000G	45.0 (1274)	8 Shelves	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REFVAC45-PH-00000G	45.0 (1274)	12 Baskets	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REFVAC45-PD-00000G	45.0 (1274)	12 Drawers	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory

REF45-BB double door upright refrigerators for blood banks

Blood bank refrigerators meet AABB and FDA requirements for storage of blood at 4 C. Stainless steel interior/exterior with top and bottom temperature probes and 16 oz bottle of glycerine. Right-hinged, left-hinged or outer-hinged self-closing glass doors with full-view, double pane glass with Low-E coating – hinging must be specified at time of order. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 6.00" (15.24 cm) chart recorder. 115V/60/1 (103-132V) electrical. 12 stainless steel, full-extension drawers standard.

For additional product information, request form# 8160.

Item number	Cubic capacity cu ft (L)	Bags (450 ml)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF45-BB-R0000G	45.0 (1274)	816	12 drawers	right	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-L0000G	45.0 (1274)	816	12 drawers	left	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-00000G	45.0 (1274)	816	12 drawers	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-000KPG	45.0 (1274)	816	12 drawers	outer	glass	no	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-RHT00G	45.0 (1274)	816	12 drawers	right	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-LHT00G	45.0 (1274)	816	12 drawers	left	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-0HT00G	45.0 (1274)	816	12 drawers	outer	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-0HTKPG	45.0 (1274)	816	12 drawers	outer	alass	ves	ves	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory

Countertop freezers





FZR1 and FZR2 countertop freezers

Medical-grade countertop freezers for small storage needs. Forced air, external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.

For additional product information, request form# 6860 for FZR1 or 6865 for FZR2.

See page 30 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZR1	0.6 (16)	right	no	stainless	18.60 (47.2)	24.00 (61.0)	17.93 (45.5)	108 (49)	\$6,660
FZR1-KP	0.6 (16)	right	yes	stainless	18.60 (47.2)	24.00 (61.0)	17.93 (45.5)	108 (49)	\$7,435
FZR2	1.6 (44)	right	no	stainless	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	126 (57)	\$7,090
FZR2-KP	1.6 (44)	right	yes	stainless	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	126 (57)	\$7,865

FZRVAC2 countertop NSF 456 certified vaccine freezers

Medical-grade countertop NSF/ANSI 456 certified vaccine freezers. Forced air, external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.


For additional product information, request form# 9125.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZRVAC2	1.6 (44)	right	no	stainless	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	126 (57)	\$7,315

Undercounter freezers



Performance Plus LED display



Performance Plus 7" LCD touchscreen display



Edge Series

FZR4P and FZR5P Performance Plus undercounter freezers

Medical-grade -20 C (-4 F), undercounter freezers, freestanding or stackable, with external temperature display in F or C, integral alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model FZR4P fits below 34.00" (86.4 cm) ADA-compatible counter and model FZR5P fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order.

For additional product information, request form# 6465 for FZR4P, 6470 for FZR5P, 6515 for FZR4P-T, or 6520 for FZR5P-T. See page 30 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital temp	erature display								
FZR4P-0R-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$8,865
FZR5P-0R-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$8,865
FZR4P-0R-KP-00	3.9 (110)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$9,640
FZR5P-0R-KP-00	4.5 (127)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$9,640
FZR4P-0L-00-00	3.9 (110)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$8,865
FZR5P-0L-00-00	4.5 (127)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$8,865
FZR4P-0L-KP-00	3.9 (110)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$9,640
FZR5P-0L-KP-00	4.5 (127)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$9,640
7" ICD toucheero	en digital tempera	sturo dienla	•						
FZR4P-TR-00-00	3.9 (110)			stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	¢10./1E
FZR5P-TR-00-00	4.5 (127)	right right	no no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,415 \$10,415
FZR4P-TR-KP-00	, ,	•		stainless	, ,	` '	, ,	, ,	
	3.9 (110)	right	yes		23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$10,865
FZR5P-TR-KP-00	4.5 (127)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,865
FZR4P-TL-00-00	3.9 (110)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$10,415
FZR5P-TL-00-00	4.5 (127)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,415
FZR4P-TL-KP-00	3.9 (110)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$10,865
FZR5P-TL-KP-00	4.5 (127)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,865

FZRVAC4P and FZRVAC5P Performance Plus undercounter NSF 456 certified vaccine freezers

Medical-grade undercounter NSF/ANSI 456 certified vaccine freezers. -20 C (-4 F), undercounter freezers, freestanding or stackable, with external temperature display in F or C, integral alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model FZRVAC4P fits below 34.00" (86.4 cm) ADA-compatible counter and model FZRVAC5P fits below a standard 36.00" (91.4 cm) high counter. Right-hinged only.

For additional product information, request form# 9120.

See page 30 for additional accessory information.

Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
ure display								
3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$9,090
4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$9,090
ligital temperatur	e display							
3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$10,640
4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,640
	cu ft (L) ure display 3.9 (110) 4.5 (127) ligital temperatur 3.9 (110)	cu ft (L) Hinging ure display 3.9 (110) right 4.5 (127) right ligital temperature display 3.9 (110) right	cu ft (L) Hinging Keypad ure display 3.9 (110) right no 4.5 (127) right no ligital temperature display 3.9 (110) right no	cu ft (L) Hinging Keypad Door style ure display 3.9 (110) right no stainless 4.5 (127) right no stainless ligital temperature display 3.9 (110) right no stainless	cu ft (L) Hinging Keypad Door style in (cm) ure display 3.9 (110) right no stainless 23.75 (60.3) 4.5 (127) right no stainless 23.75 (60.3) ligital temperature display 3.9 (110) right no stainless 23.75 (60.3)	cu ft (L) Hinging Keypad Door style in (cm) in (cm) ure display 3.9 (110) right no stainless 23.75 (60.3) 27.00 (68.6) 4.5 (127) right no stainless 23.75 (60.3) 27.00 (68.6) ligital temperature display 3.9 (110) right no stainless 23.75 (60.3) 27.00 (68.6)	cu ft (L) Hinging Keypad Door style in (cm) in (cm) in (cm) ure display 3.9 (110) right no stainless 23.75 (60.3) 27.00 (68.6) 31.38 (79.7) 4.5 (127) right no stainless 23.75 (60.3) 27.00 (68.6) 34.00 (86.4) ligital temperature display 3.9 (110) right no stainless 23.75 (60.3) 27.00 (68.6) 31.38 (79.7)	cu ft (L) Hinging Keypad Door style in (cm) in (cm) in (cm) lb (kg) ure display 3.9 (110) right no stainless 23.75 (60.3) 27.00 (68.6) 31.38 (79.7) 205 (93) 4.5 (127) right no stainless 23.75 (60.3) 27.00 (68.6) 34.00 (86.4) 205 (93) ligital temperature display 3.9 (110) right no stainless 23.75 (60.3) 27.00 (68.6) 31.38 (79.7) 205 (93)

FZR5PLP-T Performance Plus undercounter plasma freezer

High performance -30 C (-22 F), undercounter plasma freezer, freestanding or stackable, with 7" LCD touchscreen user interface with integral data and event logging. Stainless steel construction on interior/exterior with interior LED lighting. 115V/60/1 electrical. For undercounter applications: fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order. Two full extension stainless drawers standard. Includes separate temperature surveillance module with audible/visual alarm, 7-day chart recorder and digital product temperature display. Meets AABB, FDA, ARC requirements.

For additional product information, request form# 6480.

See page 30 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Plasma boxes (300 ml)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZR5PLP-TR-00-00	4.5 (127)	40	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$14,705
FZR5PLP-TR-KP-00	4.5 (127)	40	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$15,155
FZR5PLP-TL-00-00	4.5 (127)	40	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$14,705
FZR5PLP-TL-KP-00	4.5 (127)	40	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$15,155


FZRNAT5 Edge Series undercounter freezer

Medical-grade undercounter freezer with LED control, right-hinged solid door, painted steel exterior, preset automatic alarm tracking around set point, 3 coated steel wire shelves, manual defrost, variable speed compressor, R600a natural refrigerant. 115V/60/1 electrical. Fits below standard 36.00" (91.4 cm) counter.

For additional product information, request form# 9050.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	Net price
FZRNAT5-SD	5.0 (142 L)	right	no	painted steel	23.84 (60.6)	24.50" (62.2)	34.10 (86.6)	130 (59)	\$2,795

Upright freezers

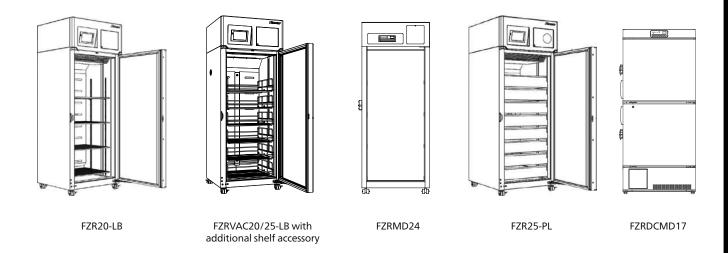

FZR20-LB and FZR25-LB single door upright freezers for laboratory and pharmacy

Medical-grade -30 C laboratory and pharmacy freezers for critical product storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right or left-hinged, heavy-duty, insulated stainless steel door with ADA-compliant full length locking handle. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves standard.

For additional product information, request form# 8065 for FZR20 and 8070 for FZR25.

See page 31 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZR20-LB-RHT00S	19.7 (558)	4 shelves	right	stainless	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	480 (218)	Contact factory
FZR25-LB-RHT00S	24.6 (697)	4 shelves	right	stainless	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	480 (218)	Contact factory
FZR20-LB-RHTKPS	19.7 (558)	4 shelves	right	stainless	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	480 (218)	Contact factory
FZR25-LB-RHTKPS	24.6 (697)	4 shelves	right	stainless	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	480 (218)	Contact factory
FZR20-LB-LHT00S	19.7 (558)	4 shelves	left	stainless	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	480 (218)	Contact factory
FZR25-LB-LHT00S	24.6 (697)	4 shelves	left	stainless	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	480 (218)	Contact factory
FZR20-LB-LHTKPS	19.7 (558)	4 shelves	left	stainless	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	480 (218)	Contact factory
FZR25-LB-LHTKPS	24.6 (697)	4 shelves	left	stainless	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	480 (218)	Contact factory

FZRVAC20-LB and FZRVAC25-LB single door upright NSF 456 certified vaccine freezers

Medical-grade NSF/ANSI 456 certified vaccine -30 C freezers for laboratory and pharmacy. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged, heavy-duty, insulated stainless steel door with ADA-compliant full length locking handle. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves standard.

For additional product information, request form# 9035.

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZRVAC20-LB-RHT00S	19.7 (558)	4 shelves	right	stainless	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	480 (218)	Contact factory
FZRVAC25-LB-RHT00S	24.6 (697)	4 shelves	right	stainless	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	480 (218)	Contact factory

FZRMD24 -30 C single door upright freezer for laboratory

PHCbi brand high performance biomedical freezer, 24.4 cu ft capacity, -18 C to -40 C temperature range, solid door, 4 adjustable shelves, microprocessor controller with digital display. High/low temperature, power failure and door alarming. 115V/60/1 electrical. ENERGY STAR certified.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZRMD24	24.4 (690)	4 shelves	30.30 (77.0)	32.70 (83.0)	77.00 (195.5)	568 (258)	Contact factory

FZR20 and FZR25 single door upright freezers for plasma

Plasma freezers meet AABB and FDA requirements for storage of blood plasma at -30 C. Stainless steel interior/exterior with top and bottom temperature probes and 16 oz bottle of glycerine. Right-hinged, heavy-duty, insulated stainless steel door with ADA-compliant full length locking handle (left-hinged door available – must be specified at time of order). External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 6.00" (15.24 cm) chart recorder and 8 stainless steel, full-extension drawers standard.

For additional product information, request form# 8080.

See page 31 for additional accessory information.

Item number	Cubic capacity cu ft (L)	FFP ¹ cartons (5"x8"x1.13")	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZR20-PL-RHT00S	19.7 (558)	352	8 drawers	right	stainless	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	568 (258)	Contact factory
FZR25-PL-RHT00S	24.6 (697)	472	8 drawers	right	stainless	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	628 (285)	Contact factory
FZR20-PL-RHTKPS	19.7 (558)	352	8 drawers	right	stainless	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	568 (258)	Contact factory
FZR25-PL-RHTKPS	24.6 (697)	472	8 drawers	right	stainless	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	628 (285)	Contact factory
FZR20-PL-LHT00S	19.7 (558)	352	8 drawers	left	stainless	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	568 (258)	Contact factory
FZR25-PL-LHT00S	24.6 (697)	472	8 drawers	left	stainless	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	628 (285)	Contact factory
FZR20-PL-LHTKPS	19.7 (558)	352	8 drawers	left	stainless	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	568 (258)	Contact factory
FZR25-PL-LHTKPS	24.6 (697)	472	8 drawers	left	stainless	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	628 (285)	Contact factory
¹ Fresh frozen p	lasma.											

[,]

FZR8-PC plasma chiller

Item number

FZR8-PC

High performance -40 C to -40 F plasma chiller with touchscreen temperature controller and alarms. Stainless steel AISI 304 interior and exterior construction. 220V/60/3 electrical. 4 casters and 8 shelves.

Intended for use as a rapid freezer. This is not intended for long-term storage.

For additional product information, request form# 8930.



Approx. ship wt **Cubic capacity** Width Depth Height lb (kg) List price cu ft (L) Storage system in (cm) in (cm) in (cm) 7.5 cu ft (212) 8 shelves 31.50 (80.0) 32.88 (83.5) 77.31 (196.4) 541 (245) Contact factory (72) bags

FZRDCMD17 dual chamber biomedical ECO upright freezer

PHCbi brand -40 C biomedical ECO dual chamber freezer, 16.9 cu ft capacity (8.46 cu ft per chamber), -20 C to -40 C temperature range, solid doors, 6 shelves (4 adjustable), microprocessor controller with LED display. Manual defrost function. High/low temperature, power failure alarming. ENERGY STAR certified.

For additional product information, request form# 12618.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRDCMD17	16.9 (479)	6 shelves	31.20 (79.3)	30.30 (77.0)	70.90 (180.1)	115/60	410 (186)	Contact factory

Combination refrigerator/freezer



REFFZR9 pharmaceutical combination refrigerator and freezer

Model REFFZR9-GS. PHCbi brand pharmaceutical combination 6.3 cu ft refrigerator (+2 C to +14 C) and 2.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, glass door on refrigerator, solid door on freezer, 3 glass shelves in refrigerator/1 coated wire shelf in freezer.

Model REFFZR9-SS. PHCbi brand pharmaceutical combination 6.3 cu ft refrigerator (+2 C to +14 C) and 2.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, solid door on refrigerator and freezer, 3 glass shelves in refrigerator/1 coated wire shelf in freezer. For additional product information, request form# 12839.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
REFFZR9	6.3 (178) refrigerator 2.8 (79) freezer	3 glass shelves in refrigerator 1 wire shelf in freezer	20.00 (50.8)	25.00 (63.5)	71.20 (180.1)	115/60	210 (95)	Contact factory

REFFZR16 pharmaceutical combination refrigerator and freezer

Model REFFZR16-GS. PHCbi brand pharmaceutical combination 11.5 cu ft refrigerator (+2 C to +14 C) and 4.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, glass double doors on refrigerator, solid double doors on freezer, 3 adjustable shelves in refrigerator/2 shelves in freezer, microprocessor controller with softkey interface and OLED display. High/low temperature, power, sensor and door alarms.

Model REFFZR16-SS. PHCbi brand pharmaceutical combination 11.5 cu ft refrigerator (+2 C to +14 C) and 4.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, solid double doors on refrigerator and freezer, 3 adjustable shelves in refrigerator/2 shelves in freezer, microprocessor controller with LED display. High/low temperature, power, sensor and door alarms.

For additional product information, request form# 12507.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
REFFZR16	11.5 (326) refrigerator 4.8 (136) freezer	3 shelves in refrigerator 2 shelves in freezer	31.50 (80.0)	25.20 (64.0)	71.30 (181.1)	115/60	337 (153)	Contact factory


REFFZR21 pharmaceutical combination refrigerator and freezer


PHCbi brand pharmaceutical combination 14.7 cu ft refrigerator (\pm 2 C to \pm 14 C) and 6.2 cu ft freezer (\pm 30 C to \pm 20 C), independent refrigeration systems, glass double doors on refrigerator, solid double doors on freezer, 3 adjustable shelves in refrigerator/2 shelves in freezer, microprocessor controller with softkey interface and OLED display. High/low temperature, power, sensor and door alarms.

For additional product information, request form# 12620.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
REFFZR21-GS	14.7 (415) refrigerator 6.2 (176) freezer	3 shelves in refrigerator 2 shelves in freezer	35.40 (90.0)	28.10 (71.5)	75.20 (191.0)	115/60	439 (199)	Contact factory

Ultra-low chest freezers





FZRC3-80 C ultra-low temperature chest freezer

PHCbi brand VIP Series -80 C ultra-low temperature chest freezer, 3.0 cu ft capacity, -60 C to -80 C temperature range, insulated locking lid with sub for additional temperature protection, microprocessor controller with LED display. High/low temperature, power failure alarming. ENERGY STAR certified.

For additional product information, request form# 12599.

Item number	Cubic capacity cu ft (L)	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRC3-ULT-115	3.0 (85)	21.70 (55.0)	27.00 (68.5)	37.20 (94.5)	115/60	190 (86)	Contact factory


FZRC25-86 C ultra-low temperature chest freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature chest freezer with dual cooling system, 25.3 cu ft capacity, -50 C to -86 C temperature range, insulated locking lid with sub lid for additional temperature protection, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12684.

Iten	n number	Cubic capacity cu ft (L)	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price	
FZR	C25-ULT-220	25.3 (708)	90.60 (230.0)	37.60 (95.5)	42.10 (107.0)	220/60	807 (366)	Contact factory	

Ultra-low upright freezers

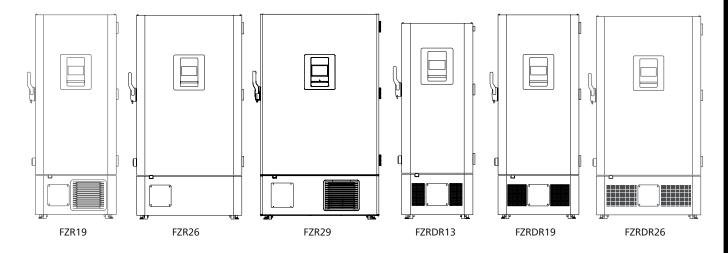

FZR19 -86 C ultra-low temperature VIP ECO upright freezer

PHCbi brand VIP ECO Series -86 C ultra-low temperature upright freezer, 18.6 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms. ENERGY STAR certified.

For additional product information, request form# 12600.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZR19-ULT-115	18.6 (528)	3 shelves	31.10 (79.0)	34.70 (88.2)	78.50 (199.3)	115/60	628 (285)	Contact factory
FZR19-ULT-220	18.6 (528)	3 shelves	31.10 (79.0)	34.70 (88.2)	78.50 (199.3)	220/60	628 (285)	Contact factory

FZR26 -86 C ultra-low temperature VIP ECO upright freezer

PHCbi brand VIP ECO Series -86 C ultra-low temperature upright freezer, 25.7 cu ft capacity, -40 C to -90 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms. ENERGY STAR certified.

For additional product information, request form# 12506.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZR26-ULT-115	25.7 (729)	3 shelves	25.7 (729)	36.80 (93.5)	78.50 (199.3)	115/60	827 (375)	Contact factory
FZR26-ULT-220	25.7 (729)	3 shelves	25.7 (729)	36.80 (93.5)	78.50 (199.3)	220/60	827 (375)	Contact factory

FZR29 -86 C ultra-low temperature VIP ECO upright freezer

PHCbi brand VIP ECO Series -86 C ultra-low temperature upright freezer, 29.8 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms. ENERGY STAR certified.

For additional product information, request form# 12601.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZR29-ULT-115	29.8 (845)	3 shelves	45.30 (115.0)	34.30 (87.0)	78.50 (199.3)	115/60	855 (387)	Contact factory

FZRDR13 -86 C ultra-low temperature TwinGuard upright freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature upright freezer with dual cooling system, 12.7 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 inner insulated doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12615.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRDR13-ULT-220	12.7 (360)	3 shelves	26.40 (67.0)	34.70 (88.2)	72.40 (184.0)	220/60	556 (252)	Contact factory

FZRDR19 -86 C ultra-low temperature TwinGuard upright freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature upright freezer with dual cooling system, 18.6 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12616.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRDR19-ULT-220	18.6 (528)	3 shelves	31.10 (79.0)	34.70 (88.2)	78.50 (199.3)	220/60	723 (328)	Contact factory


FZRDR26 -86 C ultra-low temperature TwinGuard upright freezer


PHCbi brand TwinGuard Series -86 C ultra-low temperature upright freezer with dual cooling system, -50 C to -86 C temperature range, 25.7 cu ft capacity, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12617.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRDR26-ULT-220	25.7 (729)	3 shelves	40.60 (103.0)	36.8 (93.5)	78.50 (199.3)	220/60	827 (375)	Contact factory

Cryogenic freezers and CO2 incubators





CO2INC30-G

FZRC8 -150 C cryogenic chest freezer

PHCbi brand -150 C cryogenic chest freezer with autocascade refrigeration system, 8.2 cu ft capacity, -125 C to -150 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, microprocessor controller with LCD display. High/low temperature, sensor, power, and lid alarms.

For additional product information, request form# 12602.

Item number	Cubic capacity cu ft (L)	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRC8-220	8.2 (232.2)	68.10 (173.0)	30.10 (76.5)	39.80 (101.0)	220/60	961 (436)	Contact factory

CO2INC30 Reach-In CO2 incubator

PHCbi brand Reach-in CO2 incubator, 30.1 cu ft, glass door, normal (80% RH or above) or high (90% RH or above) humidity mode, microprocessor controller with 2 LED displays (temperature and CO2), 5 shelves. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12621.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
CO2INC30-G	30.1 (851)	5 shelves	38.60 (98.6)	37.2 (94.5)	80.3 (204.0)	115/60	694 (315)	Contact factory

Refrigerator and freezer accessories

Countertop refr	gerator and freezer accessories and warranties	
Item number	Description	List price
00969931	Organizing bins, set of 6	\$140
00969956	Additional shelf (1)	\$140
00959296	Glycerine, 16 oz	\$110
00969949	Wall mount kit	\$850
01111947	Casters (set of 4)	\$490
01184845	Pedestal, 2.00" (5.08 cm)	\$770
01025899	Pedestal, fan-assist, 4.50" (11.43 cm)	\$560
01025881	Pedestal, 12.00" (30.5 cm)	\$560
01100742	Stacking kit (countertop on countertop)	\$780
01100759	Stacking kit (countertop on Performance Plus undercounter)	\$780
01142363	Stacking kit (countertop on REF/FZR Series undercounter)	\$780
01092022	NO/NC dry contacts for connection to remote alarm systems	\$90
00112185	Temperature alarm with dry contacts for remote alarming	\$860
00168674	Temperature surveillance module (includes alarm, 6.00" (15.24 cm) chart recorder, remote contacts)	\$2,770
01077841	Replacement NTC probe with certificate of NIST-traceable calibration	\$340
01528512	DicksonOne VFC-compliant freestanding display data logger with Wi-Fi and Ethernet capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$1,240
01528538	DicksonOne VFC-compliant freestanding touchscreen data logger with Power Over Ethernet and Wi-Fi capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$1,840
01539691	Ambient temperature and humidity sensor, right angle, for use with DicksonOne freestanding display and touchscreen data loggers	\$250
Item number	Description	Net price
EW12	Optional extended one year warranty on parts and labor only (available with new equipment only)	\$150
EW36	Optional extended three year warranty on parts and labor only (available with new equipment only)	\$300

Undercounter refric	derator and freeze	r accessories and	l warranties

Item number	Description	List price
01059484	Additional shelf (1), Performance Plus	\$200
01462316	Additional shelves (2), REFADV5-SD	\$100
01053644	Drawer accessory kit (1 drawer, glide hardware, flush front panel), Performance Plus. Not for use with VAC models.	\$430
01067750	Drawer accessory kit (2 drawers, glide hardware, flush front panel), Performance Plus. Not for use with VAC models.	\$580
00959296	Glycerine, 16 oz	\$110
00153700	Wall mount kit, Performance Plus	\$610
01059104	Seismic bracket kit, Performance Plus	\$520
01053636	Casters (set of 4 with spacers), Performance Plus	\$380
01059120	Pedestal base, 23.75" wide x 24.00" deep x 17.00" high (60.3 x 61.0 x 43.2 cm), stainless, Performance Plus	\$1,190
01528157	Stacking kit (Edge Series on Edge Series)	\$760
01054006	Stacking kit (Performance Plus on Performance Plus)	\$760
01067172	Stacking kit (REF/FZR Series on Performance Plus)	\$780
01059096	Universal ADC-compatible bracket (for all medication dispensing system locks), Performance Plus	\$180
01092022	NO/NC dry contacts for connection to remote alarm systems, Performance Plus	\$90
00112185	Temperature alarm with dry contacts for remote alarming	\$860
00168674	Temperature surveillance module (includes alarm, 6.00" (15.24 cm) chart recorder, remote contacts)	\$2,770
01077841	Replacement NTC probe with certificate of NIST-traceable calibration	\$340
01528512	DicksonOne VFC-compliant freestanding display data logger with Wi-Fi and Ethernet capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$1,240
01528538	DicksonOne VFC-compliant freestanding touchscreen data logger with Power Over Ethernet and Wi-Fi capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$1,840
01539691	Ambient temperature and humidity sensor, right angle, for use with DicksonOne freestanding display and touchscreen data loggers	\$250
Item number	Description	Net price
EW12	Optional extended one year warranty on parts and labor only (available with new equipment only)	\$300
EW36	Optional extended three year warranty on parts and labor only (available with new equipment only)	\$600

lpright refriger	ator and freezer accessories and warranties	
Item number	Description	List price
01548791	Replacement CRS (Complete Refrigeration System) module, all Infinty Series models (REF12i, REF20i, REF25i)	\$4,300
1312529	Replacement CRS (Complete Refrigeration System) module, REF12	\$2,730
1147891	Replacement high-side refrigeration module (complete condensing unit), REF45, REFVAC45	\$3,470
1007004	Replacement CRS (Complete Refrigeration System) module, FZR20/25	\$7,150
1059484	Additional shelf kit (includes 1 shelf and 4 screws), REF12i	\$200
1548809	Additional shelf kit (includes 1 shelf and 4 screws), REF20i	\$250
1548817	Additional shelf kit (includes 1 shelf and 4 screws), REF25i	\$250
1461268	Additional shelf (1), REFVAC20-LB, FZRVAC20-LB	\$200
1460708	Additional shelf (1), REFVAC25/45-LB, FZRVAC25-LB	\$200
1311976	Additional shelf (1), REF12-LB	\$200
0927251	Additional shelves (2), REF20-LB, FZR20-LB	\$380
0927269	Additional shelves (2), REF25/45-LB, FZR25-LB	\$380
1543925	Basket kit (includes 1 basket, 8 rollers, 4 screws and nuts and 2 slides), REF12i	\$400
1548825	Basket kit (includes 1 basket, 8 rollers, 8 screws and nuts and 2 slides), REF20i	\$400
1548833	Basket kit (includes 1 basket, 8 rollers, 8 screws and nuts and 2 slides), REF25i	\$400
1543933	Drawer kit (includes 1 drawer, 8 rollers, 4 screws and nuts and 2 slides), REF12i	\$420
1548841	Drawer kit (includes 1 drawer, 8 rollers, 8 screws and nuts and 2 slides), REF20i	\$420
1548858	Drawer kit (includes 1 drawer, 8 rollers, 8 screws and nuts and 2 slides), REF25i	\$420
0927202	Pyxis* compatible door bracket, REF20/25/45	\$430
0978296	medDISPENSE* compatible door bracket, REF20/25/45, FZR20/25	\$430
0966432	Omnicell* compatible door bracket, REF20/25/45	\$430
1319441	Wall bracket kit, seismic anchoring, REF12	\$330
1543883	Wall bracket kit, seismic anchoring, REF12i	\$320
0927194	Wall bracket kit, seismic anchoring, REF20i/25i, REF20/25/45, FZR20/25	\$330
1140458	Replacement "quick-connect" RTD probe with certificate of NIST-traceable calibration, REF12, REF20/25, REFVAC20/25, REF45 and REFVAC45 before serial number Q86639, FZR20/25 and FZRVAC20/25	\$580
1540640	Replacement "quick connect" RTD probe with certificate of NIST-traceable calibration, REF45 and REFVAC45 after serial number Q86638	\$580
1528512	DicksonOne VFC-compliant freestanding display data logger with Wi-Fi and Ethernet capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$1,240
1528538	DicksonOne VFC-compliant freestanding touchscreen data logger with Power Over Ethernet and Wi-Fi capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$1,840
)1539691	Ambient temperature and humidity sensor, right angle, for use with DicksonOne freestanding display and touchscreen data loggers	\$250
tem number	Description	Net price
W12	Optional extended one year warranty on parts and labor only, REF12 (available with new equipment only)	\$450
W36	Optional extended three year warranty on parts and labor only, REF12 (available with new equipment only)	\$900
W12	Optional extended one year warranty on parts and labor only, REF20/25 (available with new equipment only)	\$450
W36	Optional extended three year warranty on parts and labor only, REF20/25 (available with new equipment only)	\$900
W12	Optional extended one year warranty on parts and labor only, REF45 (available with new equipment only)	\$600
W36	Optional extended three year warranty on parts and labor only, REF45 (available with new equipment only)	\$1,300
W12	Optional extended one year warranty on parts and labor only, FZR20/FZR25 (available with new equipment only)	\$600
:W36	Optional extended three year warranty on parts and labor, FZR20/FZR25 (available with new equipment only)	\$1,200

Ice and water dispensers

Follett ice and water dispensers are chosen by more healthcare facilities than any other brand for good reason. We offer the industry's largest selection, with more than 30 sizes and configurations to meet the needs of virtually any application. Designed specifically for healthcare, Follett dispensers offer 12, 25, 50 or 90 lb of storage in attractive, space-saving cabinets, with customer-valued features, exceptional reliability, and after-the-sale service and support.

Warrantv

Symphony Plus™ ice and water dispensers

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 3 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 3 year period are covered under this warranty. For products sold outside of the U.S., the labor warranty will apply only to equipment sold and serviced through a Follett Authorized Distributor in its designated territory.

The compressor shall be covered for an additional 2 years (parts only), for a total of 5 years from the date of installation.

WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett.
- Customer has documented record of preventive maintenance and cleaning of the machine every 6 months according to the instructions in the dispenser Installation, Operations and Service Manual.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond the control of Follett are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.

This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship. Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.

Symphony Plus ice and water dispensers – 12 series


Countertop and wall mount ice and water dispensers with 12 lb (5.4 kg) of storage. 12CI and C12CI integral ice machine uses R404a refrigerant and produces up to 425 lb (193 kg) of ice per day. E12Cl integral ice machine uses R290 refrigerant and produces up to 388 lb (176 kg) of ice per day. C12Cl and E12Cl models are not for use in the United States.

All models feature stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing. Wall mount models only available with SensorSAFE infrared dispensing.

For additional product information, request form# 6620 for 12CI models, 6625 for 12HI models, 6940 for C12CI models, or 1000 for E12CI.

12 series accessories List price

See page 38 for additional accessory information.



Countertop with integral ice machine



Wall mount with integral ice machine (SensorSAFE dispensing only)

Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
12CI425 series ice	and water dispe	nsers								
12CI425A-S	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	199 (90)	\$11,455
12CI425A-L	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	23.50 (59.7)	air-cooled	integral	115/60/1	199 (90)	\$11,455
C12CI425A-S ¹	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	220/60/1 ¹	199 (90)	\$11,665
C12CI425A-L ¹	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	220/60/1 ¹	199 (90)	\$11,665
12HI425A-S0-00	Wall mount ²	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	179 (81)	\$14,535
12HI425A-S0-DP	Wall mount ²	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	184 (84)	\$14,980
E12CI414 series ice and water dispensers										
E12CI414A-S ¹	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	230/50/1 ¹	199 (90)	\$11,665
E12CI414A-L ¹	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	230/50/1 ¹	199 (90)	\$11,665

¹ Models not for use in the United States.

Symphony Plus ice-only dispensers – 12 series

Countertop ice dispensers with 12 lb (5.4 kg) of storage. Ice-only; no water. 12Cl and C12Cl integral ice machine uses R404a refrigerant and produces up to 425 lb (193 kg) of ice per day. E12CI integral ice machine uses R290 refrigerant and produces up to 388 lb (176 kg) of ice per day. C12Cl and E12CI models are not for use in the United States.

All models feature stainless steel cabinet with accent trim. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.

For additional product information, request form# 6620 for 12CI models, 6625 for 12HI models, 6940 for C12Cl models, or 1000 for E12Cl.

12 series accessories List price



Countertop with integral ice machine


Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
12Cl425 series ic	e-only dispensers									
12CI425A-SI	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	199 (90)	\$11,455
12CI425A-LI	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	199 (90)	\$11,455
C12CI425A-SI ¹	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	220/60/1 ¹	199 (90)	\$11,665
C12CI425A-LI ¹	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	220/60/1 ¹	199 (90)	\$11,665
E12Cl414 series ice-only dispensers										
E12CI414A-SI ¹	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	230/50/1 ¹	199 (90)	\$11,665
E12CI414A-LI ¹	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	230/50/1 ¹	199 (90)	\$11,665

¹ Models not for use in the United States.

² 12HI425A-S0-DP wall mount unit configured with drain pan. 12HI425A-S0-00 wall mount unit configured without drain pan.

Symphony Plus ice and water dispensers with removable ice machine – 25 and 50 series







Wall mount with removable ice machine behind splash panel



Freestanding with removable ice machine in base

Approx.

Countertop, freestanding and wall mount ice and water dispensers with 25 lb (11.3 kg) or 50 lb (22.7 kg) of storage. Removable icemaking module uses R404a refrigerant and produces up to 425 lb (193.0 kg) of ice per day. Stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing. Wall mount models only available with SensorSAFE infrared dispensing.

For additional product information, request form# 6630 for 25Cl and 50Cl models, 6635 for 25Hl and 50Hl models, 6650 for 25FB and 50FB models, or 7090 for C25CI and C50CI models.

25 and 50 series accessories List price 4.00" (10.16 cm) leg kit for 25Cl and 50Cl (item# 00188417) \$290 Caster kit for 25FB and 50FB (item# AFCASTERKIT) \$630

Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	ship wt lb (kg)	List price
25 series ice and	water dispenser	S								
25CI425A-S	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	115/60/1	240 (109)	\$15,800
25CI425A-L	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	115/60/1	240 (109)	\$15,800
C25CI425A-S ¹	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	220/60/1 ¹	240 (109)	\$16,005
C25Cl425A-L ¹	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	220/60/1 ¹	240 (109)	\$16,005
25CI425W-S	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	water-cooled	behind splash panel	115/60/1	240 (109)	\$15,800
25Cl425W-L	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	water-cooled	behind splash panel	115/60/1	240 (109)	\$15,800
25HI425A-S0-00	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	36.50 (92.7)	air-cooled	behind splash panel	115/60/1	230 (104)	\$18,465
25HI425A-S0-DP	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	36.50 (92.7)	air-cooled	behind splash panel	115/60/1	235 (107)	\$19,490
25FB425A-S	Freestanding ³	SensorSAFE	21.00 (53.3)	24.75 (62.9)	62.88 (159.7)	air-cooled	base mounted	115/60/1	250 (113)	\$17,310
25FB425A-L	Freestanding ³	Lever	21.00 (53.3)	24.75 (62.9)	62.88 (159.7)	air-cooled	base mounted	115/60/1	250 (113)	\$17,310
25FB425W-S	Freestanding ³	SensorSAFE	21.00 (53.3)	24.75 (62.9)	62.88 (159.7)	water-cooled	base mounted	115/60/1	250 (113)	\$17,310
25FB425W-L	Freestanding ³	Lever	21.00 (53.3)	24.75 (62.9)	62.88 (159.7)	water-cooled	base mounted	115/60/1	250 (113)	\$17,310
50 series ice and	water dispenser	S								
50CI425A-S	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	115/60/1	245 (111)	\$16,950
50Cl425A-L	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	115/60/1	245 (111)	\$16,950
C50Cl425A-S ¹	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	220/60/1 ¹	245 (111)	\$17,155
C50Cl425A-L ¹	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	220/60/1 ¹	245 (111)	\$17,155
50Cl425W-S	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	water-cooled	behind splash panel	115/60/1	245 (111)	\$16,950
50Cl425W-L	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	water-cooled	behind splash panel	115/60/1	245 (111)	\$16,950
50HI425A-S0-00	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	40.50 (102.9)	air-cooled	behind splash panel	115/60/1	234 (106)	\$19,945
50HI425A-S0-DP	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	40.50 (102.9)	air-cooled	behind splash panel	115/60/1	239 (108)	\$20,785
50FB425A-S	Freestanding ³	SensorSAFE	21.00 (53.3)	24.75 (62.9)	66.88 (169.9)	air-cooled	base mounted	115/60/1	253 (115)	\$18,615
50FB425A-L	Freestanding ³	Lever	21.00 (53.3)	24.75 (62.9)	66.88 (169.9)	air-cooled	base mounted	115/60/1	253 (115)	\$18,615
50FB425W-S	Freestanding ³	SensorSAFE	21.00 (53.3)	24.75 (62.9)	66.88 (169.9)	water-cooled	base mounted	115/60/1	253 (115)	\$18,615
50FB425W-L	Freestanding ³	Lever	21.00 (53.3)	24.75 (62.9)	66.88 (169.9)	water-cooled	base mounted	115/60/1	253 (115)	\$18,615

¹ Models not for use in the United States

² 25HI425A-S0-DP and 50HI425A-S0-DP wall mount units configured with drain pan. 25HI425A-S0-00 and 50HI425A-S0-00 wall mount units configured without drain pan.

³ Freestanding models include 6.00" (15.24 cm) adjustable legs.

Symphony Plus series ice-only dispensers – 25 and 50 series

Countertop and wall mount ice dispensers with 25 lb (11.3 kg) or 50 lb (22.7 kg) of storage. Integral ice machine uses R404a refrigerant and produces up to 425 lb (193.0 kg) of ice per day. Stainless steel cabinet with accent trim. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.

For additional product information, request form# 6630 for 25Cl and 50Cl models, 6635 for 25HI and 50HI models, or 7090 for C25CI and C50CI models.

25 and 50 series accessories

4.00" (10.16 cm) leg kit for 25Cl and 50Cl (item# 00188417) \$290



Countertop with integral ice machine



Wall mount with integral ice machine (SensorSAFE dispensing only)

Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
25 series ice-only	dispensers									
25CI425A-SI	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	115/60/1	240 (109)	\$15,800
25CI425A-LI	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	115/60/1	240 (109)	\$15,800
C25CI425A-SI ¹	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	220/60/1 ¹	240 (109)	\$15,800
C25Cl425A-Ll ¹	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	220/60/1 ¹	240 (109)	\$15,800
25CI425W-SI	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	water-cooled	behind splash panel	115/60/1	240 (109)	\$15,800
25CI425W-LI	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	water-cooled	behind splash panel	115/60/1	240 (109)	\$15,800
25HI425A-SI-00	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	36.50 (92.7)	air-cooled	behind splash panel	115/60/1	230 (104)	\$18,465
25HI425A-SI-DP	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	36.50 (92.7)	air-cooled	behind splash panel	115/60/1	235 (107)	\$19,490
50 series ice-only	/ dispensers									
50CI425A-SI	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	115/60/1	245 (111)	\$16,950
50Cl425A-Ll	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	115/60/1	245 (111)	\$16,950
C50CI425A-SI ¹	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	220/60/1 ¹	245 (111)	\$17,155
C50Cl425A-Ll ¹	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	220/60/1 ¹	245 (111)	\$17,155
50CI425W-SI	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	water-cooled	behind splash panel	115/60/1	245 (111)	\$16,950
50Cl425W-Ll	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	water-cooled	behind splash panel	115/60/1	245 (111)	\$16,950
50HI425A-SI-00	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	40.50 (102.9)	air-cooled	behind splash panel	115/60/1	234 (106)	\$19,945
50HI425A-SI-DP	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	40.50 (102.9)	air-cooled	behind splash panel	115/60/1	239 (108)	\$20,785

¹ Models not for use in the United States.

² 25HI425A-SI-DP and 50HI425A-SI-DP wall mount units configured with drain pan and 25HI425A-SI-00 and 50HI425A-SI-00 wall mount units configured without drain pan.

Symphony Plus ice and water dispensers with removable ice machine – 110 series


Countertop and freestanding ice and water dispensers with 90 lb (40.8 kg) of storage. Removable icemaking module produces up to 425 lb (193.0 kg) of ice per day. Stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.

For additional product information, request form# 6655 for 110CT models or 6670 for 110FB models.

110 series accessories	List price
Caster kit for 110FB (item# AFCASTERKIT)	\$630

See page 38 for additional accessory information.





Countertop with top mounted Freestanding with removable removable ice machine

ice machine in base

	Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
	110 series ice and	l water dispense	rs								
	110CT425A-S	Countertop	SensorSAFE	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	air-cooled	top mounted	115/60/1	286 (130)	\$24,570
ı	110CT425A-L	Countertop	Lever	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	air-cooled	top mounted	115/60/1	286 (130)	\$24,570
	110CT425W-S	Countertop	SensorSAFE	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	water-cooled	top mounted	115/60/1	286 (130)	\$24,570
	110CT425W-L	Countertop	Lever	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	water-cooled	top mounted	115/60/1	286 (130)	\$24,570
	110FB425A-S	Freestanding 1	SensorSAFE	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	air-cooled	base mounted	115/60/1	285 (129)	\$27,085
ı	110FB425A-L	Freestanding 1	Lever	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	air-cooled	base mounted	115/60/1	285 (129)	\$27,085
	110FB425W-S	Freestanding 1	SensorSAFE	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	water-cooled	base mounted	115/60/1	285 (129)	\$27,085
	110FB425W-L	Freestanding 1	Lever	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	water-cooled	base mounted	115/60/1	285 (129)	\$27,085

¹ Freestanding models include 6.00" (15.24 cm) adjustable legs.

Symphony Plus manual load ice and water dispensers – 110 series

Countertop manual fill ice and water dispensers with 110 lb (49.9 kg) of storage. Stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.

For additional product information, request form# 6660.



Countertop, manual fill

Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price	
Manual fill 110 series ice and water dispensers											
110CM-NI-S ¹	Countertop	SensorSAFE	25.00 (63.5)	28.25 (71.8)	34.75 (88.3)	N/A	N/A	115/60/1	138 (63)	\$7,835	
110CM-NI-L ^{1,}	Countertop	Lever	25.00 (63.5)	28.25 (71.8)	34.75 (88.3)	N/A	N/A	115/60/1	138 (63)	\$7,835	

¹ Manual fill configuration, not equipped with ice machine.

Symphony Plus ice-only dispensers – 110 series

Countertop and freestanding ice dispensers with 90 lb (40.8 kg) of storage. Models equipped with integral ice machine produce up to 425 lb (193 kg) of ice per day. Stainless steel cabinet with accent trim. Water station not included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing, integral ice machine or manual fill and countertop or freestanding.

For additional product information, request form# 6655 for CT models, 6660 for CM models, or 6670 for FB models.

110 series accessories	List price
Caster kit for 110FB (item# AFCASTERKIT)	\$630

See page 38 for additional accessory information.







Countertop with top ice machine

Freestanding with mounted removable removable ice machine

Countertop, manual fill


Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
110 series ice-on	nly dispensers									
110CT425A-SI	Countertop	SensorSAFE	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	air-cooled	top mounted	115/60/1	286 (130)	\$24,570
110CT425A-LI	Countertop	lever	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	air-cooled	top mounted	115/60/1	286 (130)	\$24,570
110FB425A-SI	Freestanding	SensorSAFE	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	air-cooled	base mounted	115/60/1	285 (129)	\$27,085
110FB425A-LI	Freestanding	lever	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	air-cooled	base mounted	115/60/1	285 (129)	\$27,085
110CM-NI-SI 1	Countertop	SensorSAFE	25.00 (63.5)	28.25 (71.8)	34.75 (88.3)	N/A	N/A	115/60/1	138 (63)	\$7,835
110CM-NI-LI ¹	Countertop	lever	25.00 (63.5)	28.25 (71.8)	34.75 (88.3)	N/A	N/A	115/60/1	138 (63)	\$7,835

¹ Manual fill configuration, not equipped with ice machine.

Symphony Plus base stand options

Stainless steel base stand transforms Follett® countertop dispensers into freestanding dispensers. All bases include stainless steel exterior, and stainless legs with 6.00" (15.24 cm) adjustable flanged feet. Available with or without factory installed water filter system.

For additional product information, request form# 7010.





12 Series

25, 50, 110 Series

Item number	Description	Approx. ship wt lb (kg)	List price
12BASE-00	Base for 12 CI Series, 17.50" (44.4 cm) W x 22.00" (55.9 cm) D x 33.00" (83.8 cm) H)	74 (34)	\$1,900
12BASE-CF	12BASE-00 with standard capacity carbon filter system (00130229) installed	86 (39)	\$3,045
12BASE-HC	12BASE-00 with high capacity carbon filter system (00978957) installed	86 (39)	\$3,265
12BASE-CL	12BASE-00 with carbonless high capacity filter system (01050442) installed	86 (39)	\$3,125
25AND50BASE-00	Base for 25 and 50 CI series, 22.75" (57.8 cm) W x 24.38" (61.9 cm) D x 33.00"	78 (35)	\$1,975
25AND50BASE-CF	25AND50BASE-00 with standard capacity carbon filter system (00130229) installed	95 (43)	\$3,125
25AND50BASE-HC	25AND50BASE-00 with high capacity carbon filter system (00978957) installed	95 (43)	\$3,365
25AND50BASE-CL	25AND50BASE-00 with carbonless high capacity filter system (01050442) installed	95 (43)	\$3,215
110BASE-00	Base for 110 CT series, 26.00" (66.0 cm) W x 29.00" (73.7 cm) D x 33.00" (83.8 cm) H	96 (44)	\$3,160
110BASE-CF	110BASE-00 with standard capacity carbon filter system (00130229) installed	107 (49)	\$4,305
110BASE-HC	110BASE-00 with high capacity carbon filter system (00978957) installed	107 (49)	\$4,545
110BASE-CL	110BASE-00 with carbonless high capacity filter system (01050442) installed	107 (49)	\$4,435

Ice and water dispenser accessories

Water treatment accessories for Symphony Plus ice and water dispensers

Item number	Description	List price
Follett bacterial-ret	entive filter system	
01233659	Bacterial-retentive filter system	\$1,150
01244615	Replacement filter kit for bacterial-retentive filter system	\$480
01233717	1 micron absolute rated pre-filter cartridge	\$110
01288034	Scale inhibitor pre-filter kit for bacterial-retentive filter system	\$400
01288042	Carbon with scale inhibitor pre-filter kit for bacterial-retentive filter system	\$400
01288067	Replacement filter for scale inhibitor pre-filter kit	\$160
01288059	Replacement filter for carbon and scale inhibitor pre-filter kit	\$160
Carbonless high cap	pacity filter system	
01050442	Carbonless high capacity water filter system (one per ice machine)	\$1,160
01050426	Carbonless high capacity water filter cartridge – primary, single	\$280
01050434	Carbonless high capacity water filter cartridge – primary, carton of 6	\$1,340
00130211	Water pre-filter cartridge – pre-filter, single	\$100
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$390
Standard capacity c	arbon filter system	
00130229	Water filter system (one per ice machine)	\$1,090
00130245	Water filter cartridge – primary, single	\$250
00954297	Water filter cartridge – primary, carton of 6	\$1,140
00130211	Water pre-filter cartridge – pre-filter, single	\$100
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$390
High capacity carbo	•	
00978957	High capacity water filter system (one per ice machine)	\$1,300
00978965	High capacity water filter cartridge – primary, single	\$450
00978973	High capacity water filter cartridge – primary, carton of 6	\$2,200
00130211	Water pre-filter cartridge – pre-filter, single	\$100
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$390

Cleaning and sanitizing accessories for Symphony Plus ice and water dispensers

Item number	Description	List price				
01089572	Pressurized water sanitizing kit for use with Follett dispensers that have a Follett water filtration system¹ (includes dip tube and bypass plug)	\$120				
01089580	Pressurized water sanitizing kit for use with Follett dispensers that do not have a Follett water filtration system (includes filter housing, dip tube and bypass plug)	\$240				
01147826	SafeCLEAN Plus [™] , liquid – environmentally responsible ice machine cleaner (1 x 8 oz bottle)	\$70				
01149954	SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (6 x 8 oz bottles)	\$170				
01149962	SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (carton of 24 x 8 oz bottles)	\$510				
00979674	Nu-Calgon® IMS-III sanitizer, single 16 oz bottle	\$70				
01038652	Nu-Calgon IMS-III sanitizer, case of 12 x 16 oz bottles	\$380				
01075431	SaniSponge™, 24 pack of sanitary sponges	\$120				
¹ Applicable Follett water filter systems include 00130229, 00978957, 01050442						

Other accessories for Symphony Plus ice and water dispensers

Item number	Description	List price
01049790	Symphony Plus external drain kit (includes 10 ft (3 m) clear tubing and fitting)	\$130
AFCONDPUMP	Condensate pump	\$570

Replacement ice machine for use in existing Symphony and Symphony Plus dispensers

Item number	Width in (cm)	Depth in (cm)	Height in (cm)	per 24 hr lb (kg)	Condenser	Voltage	Ship wt lb (kg)	List price
R425A	18.84 (47.9)	20.00 (50.8)	17.00 (43.2)	400 (181)	air-cooled	115/60/1	127 (58)	\$11,025
R425W	18.84 (47.9)	22.06 (56.0)	17.00 (43.2)	400 (181)	water-cooled	115/60/1	127 (58)	\$11,025
P425A	15.30 (38.9)	19.90 (50.5)	16.80 (42.7)	425 (193)	air-cooled	115/60/1	117 (53)	\$10,510
CP425A	15.30 (38.9)	19.90 (50.5)	16.80 (42.7)	425 (193)	air-cooled	220/60/1	117 (53)	\$10,715
P425W	15.30 (38.9)	19.90 (50.5)	16.80 (42.7)	425 (193)	water-cooled	115/60/1	122 (55)	\$10,510
CP425W	15.30 (38.9)	19.90 (50.5)	16.80 (42.7)	425 (193)	water-cooled	220/60/1	122 (55)	\$10,715

Refer to matrix below for correct replacement ice machine.

Replacement ice machine ordering matrix

ispenser series	Replacement ice machine item number	Ice machine panel finish
ountertop and wall mount dispensers with top mounted ice machines	icii iuiibei	ree machine paner mila
	D4354	
25CT400A, 25HT400A, 50CT400A, 50HT400A	P425A	no panels
25CT400W, 25HT400W, 50CT400W, 50HT400W	P425W	no panels
110CT400A	P425A	no panels
110CT425A	P425A	no panels
110CT400W	P425W	no panels
110CT425W	P425W	no panels
ountertop and wall mount dispensers with ice machine behind front splash panel		
25CI400A, 50CI400A, 25HI400A, 50HI400A	P425A	no panels
25CI400W, 50CI400W	P425W	no panels
25CI425A, 50CI425A, 25HI425A, 50HI425A	P425A	no panels
25Cl425W, 50Cl425W	P425W	no panels
outs to and well around discourse with DIDT and discourse himse		
ountertop and wall mount dispensers with RIDE model ice machines		
C25R5A, H25R5A, C50R5A, H50R5A	R425A	stainless
C25R5W, H25R5W, C50R5W, H50R5W	R425W	stainless
25CR400A, 25HR400A, 50CR400A, 50HR400A	R425A	stainless
25CR400W, 25HR400W, 50CR400W, 50HR400W	R425W	stainless
25CR425A, 25HR425A, 50CR425A, 50HR425A	R425A	stainless
25CR425W, 25HR425W, 50CR425W, 50HR425W	R425W	stainless
C110R5A	R425A	stainless
C110R5W	R425W	stainless
110CR400A	R425A	stainless
110CR400W	R425W	stainless
110CR425A	R425A	stainless
110CR425W	R425W	stainless
reestanding dispensers with ice machine in base		
25FB400A, 50FB400A	P425A	no panels
25FB400W, 50FB400W	P425W	no panels
25FB425A, 50FB425A	P425A	no panels
25FB425W, 50FB425W	P425W	no panels
110FB400A	P425A	no panels
110FB400W	P425W	no panels
110FB425A	P425A	no panels
	1 42JA	iio paiicis

Ice machines

Compact, reliable Chewblet* extruded ice and flake ice machines in a variety of sizes to meet your needs. Choose from top mount or RIDE model configurations (extruded only).

Warranty

Maestro Plus[™] and Horizon Elite[™] series ice machines

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 3 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 3 year period are covered under this warranty. For products sold outside of the U.S., the labor warranty will apply only to equipment sold and serviced through a Follett Authorized Distributor in its designated territory.

The compressor shall be covered for an additional 2 years (parts only), for a total of 5 years from the date of installation.

WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett.
- Customer has documented record of preventive maintenance and cleaning of the machine every 6 months according to the instructions in the dispenser Installation, Operations and Service Manual.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond the control of Follett are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.

This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship.

Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.

Maestro Plus ice machine bins – 400 series

Flake (UF) or Micro Chewblet $^{\text{\tiny M}}$ (UM) ice machines with 75 lb (34 kg) of bin storage for undercounter or freestanding applications.

Ice machines use R290a refrigerant. Stainless steel exterior with moderate production and storage capacity in a small footprint.

For additional product information, request form# 1005 for UFD and UMD models or 1006 for UFE and UME models.

See page 49 for additional accessory information.



undercounter ice machine bin

Production capacity lb (kg)

Item number	Width in (cm)	Depth in (cm)	Height² in (cm)	90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)	Condensing unit ³	Voltage	Approx. ship wt lb (kg)	List price
UFD414A80	23.50 (59.7)	26.00 (66.0)	33.00 (83.8)	325 (148)	425 (193)	A – SC	115/60/1	194 (88)	\$12,965
UFE414A801	23.50 (59.7)	26.00 (66.0)	33.00 (83.8)	325 (148)	425 (193)	A - SC	230/50/1 ¹	194 (88)	\$13,180
UMD414A80 [†]	23.50 (59.7)	26.00 (66.0)	33.00 (83.8)	325 (148)	425 (193)	A – SC	115/60/1	194 (88)	\$12,965
UME414A801	23.50 (59.7)	26.00 (66.0)	33.00 (83.8)	325 (148)	425 (193)	A – SC	230/50/1 ¹	194 (88)	\$13,180

[†] ENERGY STAR* certified.

¹ Models not for use in the United States.

² 33.00" (83.8 cm) with leveling feet for undercounter use. 39.00" (99.1 cm) with bullet legs for freestanding application.

³ Condensing unit: A - SC = Air - self-contained

Maestro Plus Model Number Configurations Example: MCD425ABT

MC	D	4	25	Α	В	T
Ice Type	Voltage	Ice Production (approx.)	Refrigerant Type	Condenser	Application	Configuration
MC Maestro Plus Chewblet (414/425) MF Maestro Plus Flake (414/425 HC Horizon Elite Chewblet (710) HM Horizon Elite Micro Chewblet (710)	 C 220/60/1 (icemaking head) Self-contained only. D 115/60/1 (icemaking head) Self-contained only. E 230/50/1 (icemaking head) Self-contained only. 	4 400 lb (181 kg) 7 700 lb (318 kg)	14 R290 25 R404a 10 R404a	A Air-cooled, self-contained W Water-cooled, self-contained	H Harmony™ (countertop ice and beverage dispenser) B Ice storage bin	S RIDE* (RIDE remote ice delivery equipment) T Top-mount

[†] Micro Chewblet™ – For smaller Chewblet ice (approximately 3/8" long), replace second character of Horizon Elite model number with "M". Example HCD710ABS becomes HMD710ABS. Add \$235 to list price.

Maestro Plus flake ice machines for ice storage bins – 400 series

Flake ice machines for top mount on ice storage bins.

MFD425 and MFC425 models use R404a refrigerant. MFE414 models use R290a refrigerant. MFC425 and MFE414 models are not for use in the United States.

For additional product information, request form# 7015 for MFD425 models, 6950 or 6955 for MFC425 models, or 1003 for MFE414 models.

See page 49 for additional accessory information.



Top mount

Production	1 capacity
lb (l	kg)

) di	kg/				
Item number	Configuration	Width in (cm)	Depth in (cm)	Height in (cm)	90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)	Condensing unit 1	Voltage	Approx. ship wt lb (kg)	List price
425 series										
MFD425ABT	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A - SC	115/60/1	170 (77)	\$10,890
MFC425ABT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	220/60/1	170 (77)	\$11,095
MFD425WBT	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W - SC	115/60/1	170 (77)	\$10,890
MFC425WBT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W – SC	220/60/1	170 (77)	\$11,095
414 series										
MFE414ABT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A - SC	230/50/1	170 (77)	\$11,095

¹ Condensing unit: A - SC = Air - self-contained W - SC = Water - self-contained

² Models not for use in the United States.

Maestro Plus Chewblet ice machines for ice storage bins – 400 series

Ice machines for top mount or RIDE (ice-through-a-tube) configurations.

MCD425 and MCC425 models use R404a refrigerant. MCE414 and MME414 models use R290a refrigerant. MCC425 and MCE414 models are not for use in the United States.

RIDE ice machines include 10' (3 m) of insulated ice transport tube. Factory approval required for lengths over 20' (6.1 m).

For additional product information, request form# 6690 or 6695 for MCD models or 1001, 1002 or 1003 for MCE and MCC models.

Refer to page 50 of the price list for capacities and sizes of bins available.

See page 49 for additional accessory information.







RIDE model

Production capac	ιιy
lb (kg)	-

					90 F air	70 F air			Approx.	
M	C 6: 4:	Width	Depth	Height	70 F water	50 F water	Condensing		ship wt	Link and an
Item number	Configuration	in (cm)	in (cm)	in (cm)	(32/21 C)	(21/10 C)	unit 1	Voltage	lb (kg)	List price
425 series										
MCD425ABT †	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A - SC	115/60/1	170 (77)	\$10,890
MCD425ABS [†]	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	115/60/1	170 (77)	\$11,715
MCC425ABT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A - SC	220/60/1 ²	170 (77)	\$11,095
MCC425ABS ²	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	220/60/1 ²	170 (77)	\$11,925
MMC425ABT ^{2,3}	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A - SC	220/60/1 ²	170 (77)	\$11,330
MMC425ABS ^{2,3}	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	220/60/1 ²	170 (77)	\$12,160
MCD425WBT	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W – SC	115/60/1	170 (77)	\$10,890
MCD425WBS	RIDE	18.80 (47.8)	20.75 (52.7)	17.10 (43.4)	408 (185)	486 (221)	W – SC	115/60/1	170 (77)	\$11,715
MCC425WBT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W - SC	220/60/1 ²	170 (77)	\$11,095
MCC425WBS ²	RIDE	18.80 (47.8)	20.75 (52.7)	17.10 (43.4)	408 (185)	486 (221)	W – SC	220/60/1 ²	170 (77)	\$11,925
MMC425WBT ^{2,3}	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W – SC	220/60/1 ²	170 (77)	\$11,330
MMC425WBS ^{2,3}	RIDE	18.80 (47.8)	20.75 (52.7)	17.10 (43.4)	408 (185)	486 (221)	W – SC	220/60/1 ²	170 (77)	\$12,160
414 series										
MCE414ABT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	230/50/1 ²	170 (77)	\$11,095
MCE414ABS ²	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	230/50/1 ²	170 (77)	\$11,925
MME414ABT ^{2,3}	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	230/50/1 ²	170 (77)	\$11,330

[†] ENERGY STAR* certified.

¹ Condensing unit: A - SC = Air - self-contained W - SC = Water - self-contained

² Models not for use in the United States.

³ Produces Micro Chewblet ice approximately 3/8" long.

Maestro Plus Chewblet ice machines for countertop ice and beverage dispensers – 400 series

Ice machines for top mount or RIDE (ice-through-a-tube) configurations.

MCD425 and MCC425 models use R404a refrigerant. MCE414 models use R290a refrigerant. MCC425 and MCE414 models are not for use in the United States.

Top mount ice machine requires stainless steel top kit, sold separately. See top kit charts on page 45 for top kit numbers.

RIDE ice machines include 10' (3 m) of insulated ice transport tube and universal RIDE model adapter kit (item# 01054444). Factory approval required for ice transport tube lengths over 20' (6.1 m). See page 45 for approved dispensers.

All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required.

For additional product information, request form# 7015 for MCD425 models, 6945, 6950 or 6955 for MCC425 models, or 1001, 1002 or 1003 for MCE414 models.

See page 49 for additional accessory information.





Top mount

RIDE model

Production capacity lb (kg)

					ın (kg)				
Item number	Configuration	Width in (cm)	Depth in (cm)	Height in (cm)	90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)	Condensing unit ¹	Voltage	Approx. ship wt lb (kg)	List price
425 series										
MCD425AHT †	Top mount	22.70 (57.7)	22.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	115/60/1	170 (77)	\$10,890
MCD425AHS†	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	115/60/1	170 (77)	\$11,715
MCC425AHT ²	Top mount	22.70 (57.7)	22.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A - SC	220/60/1 ²	170 (77)	\$11,095
MCC425AHS ²	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	220/60/1 ²	170 (77)	\$11,925
MCD425WHT	Top mount	22.70 (57.7)	22.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W - SC	115/60/1	170 (77)	\$10,890
MCD425WHS	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	408 (185)	486 (221)	W – SC	115/60/1	170 (77)	\$11,715
414 series										
MCE414AHT ²	Top mount	22.70 (57.7)	22.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	230/50/1 ²	170 (77)	\$11,095
MCE414AHS ²	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	230/50/1 ²	170 (77)	\$11,925

[†] ENERGY STAR* certified.

¹ Condensing unit: A - SC = Air - self-contained W - SC = Water - self-contained.

² Models not for use in the United States.

Approved for RIDE model – ice and beverage dispensers manufactured by others ¹							
Coca-Cola Freestyle 7000 ^{2,4} / 7100 ^{3,4} / 9000 ⁴ / 9100 ⁴	Lancer 4500-22N	Servend MD175					
Cornelius DB/DF/ED150BC Series	Lancer 4500-30N	Servend MD200					
Cornelius DB/DF/ED175BC Series	Lancer FS-16N	Servend MD250					
Cornelius DB/DF/ED200BC Series	Lancer FS-22N	Servend MDH302					
Cornelius DB/DF/ED250BC Series	Lancer FS-30N	Servend MDH402					
Cornelius DB/DF/ED300BC Series	Lancer FS-44N	Servend SV175					
Cornelius IDC215/255 and Pro Fast Gate	Lancer Sensation and TouchPoint	Servend SV200					
Cornelius IDC Pro	Pepsi Spire 3.0 ⁵ / 5.0 ⁵ / 4.1 ⁵	Servend SV250					
Cornelius Flavor Fusion/Overload	Servend MD150						

Top kits for top mount model Maestro Plus 400 series ice machines used with countertop ice and beverage dispensers

Top kit accessory item number	Ice machine model	Dispenser	Dispenser model number	Dispenser series width	List price	Specification sheet form number
Maestro Plus top mou	int applications1					
MTF24SCP 4,6	MCD425AHT	Coca-Cola	Freestyle 9000	24"	\$940	6690
MTF26SCP ⁴	MCD425AHT	Coca-Cola	Freestyle 9100	26"	\$940	6690
MTF30SCP 4,7	MCD425AHT	Coca-Cola	Freestyle 7000	30"	\$1,140	6690
MTF30SCP 4,8	MCD425AHT	Coca-Cola	Freestyle 7100	30"	\$1,140	6690
MTC22SCP	MCD425AHT	Cornelius	DB/DF/ED150BC	22"	\$935	6690
MTC24SCP	MCD425AHT	Cornelius	DB/DF/ED175BC	24"	\$935	6690
MTC30SCP	MCD425AHT	Cornelius	DB/DF/ED200/250	30"	\$1,140	6690
MTL22SCP	MCD425AHT	Lancer	FS-22N/4500-22N	22"	\$925	6690
MTL30SCP	MCD425AHT	Lancer	4500-30N	30"	\$1,140	6690
MTL30SCP-STP	MCD425AHT	Lancer	Sensation/TouchPoint	30"	\$1,140	6690
MTP24SCP	MCD425AHT	Pepsi	Spire 3.0	24"	\$935	6690
MTP30SCP	MCD425AHT	Pepsi	Spire 5.0 / 4.1	30"	\$1,140	6690

Top kits for RIDE model Maestro Plus and Horizon Elite series ice machines for use with countertop ice and beverage dispensers

Top kit accessory item number	Ice machine model	Dispenser	Dispenser model number	Dispenser series width	List price		
Required Maestro Plus series RIDE model stainless steel adapter kits ¹							
MSF30SC ^{2, 4}	Available for all	Coca-Cola	Freestyle 7000	30"	\$560		
MSF26SC ⁴	models that end in HS.	Coca-Cola	Freestyle 9100	26"	\$530		
MSP24SC ⁵	Example: MCD425AHS	Pepsi	Spire 3.0	24"	\$530		
MSP30SC ⁵	MCE414AHS	Pepsi	Spire 5.0 / 4.1	30"	\$560		

Optional Maestro Plus and Horizon Elite series RIDE model stainless steel adapter kits ¹								
MSC22SC		Cornelius	DB/DF/ED150BC	22"	\$2,260			
MSC24SC	Available for all	Cornelius	DB/DF/ED175BC	24"	\$2,365			
MSC30SC	models that end in HS.	Cornelius	DB/DF/ED200BC	30"	\$2,470			
MSC30SC	Example:	Cornelius	DB/DF/ED250BC	30"	\$2,470			
MSC44SC	MCD425AHS	Cornelius	DB/DF/ED300BC	44"	\$2,520			
MSL22SC	MCE414AHS	Lancer	FS-22N	22"	\$2,260			
MSL30SC	HCD710AHS	Lancer	4500-30N	30"	\$2,470			
MSL30SC		Lancer	FS-30N	30"	\$2,470			

¹ All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required. Approved dispensers for top mount ice machine applications are listed above.

aispensers for top mount ice machine applications are listed above.

² Top kit MSF30SC required with Coca-Cola Freestyle 7000. Top adapter IC Code 46412 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

³ Top kit MSF30SC required with Coca-Cola Freestyle 7100. Top adapter IC Code 46751 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁴ Consult with Coca-Cola and Follett to qualify application prior to ordering.

⁵ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

⁶ Adapter must also be ordered from Coca-Cola. IC Code: 46010 (Silver), 46011 (Red) or 46012 (Black).

⁷ Top adapter IC Code 46412 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁸ Top adapter IC Code 46753 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

Horizon Elite Chewblet ice machines for ice storage bins – 710 series

Ice machines for top mount or RIDE (ice-through-a-tube) configurations.

RIDE ice machines include 10' (3 m) of insulated ice transport tube. For additional tube lengths, see page 47. Maximum run length of ice transport tube is 75' (22.9 m).

Micro Chewblet ice – For smaller Chewblet ice (approximately 3/8" long), replace second character of Horizon Elite number with "M". Example HCD710ABT becomes HMD710ABT. Add \$235 to list price.

For additional product information, request form# 8225.

Refer to page 51 of the price list for capacities and sizes of bins available.

See page 49 for additional accessory information.





Top mount

RIDE model

Production capacity

	in (ng)									
Item number	Configuration	Width in (cm)	Depth in (cm)	Height in (cm)	90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)	Condensing unit ¹	Voltage	Approx. ship wt lb (kg)	List price
710 series										
HCD710ABT †	Top mount	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A - SC	115/60/1	190 (87)	\$14,915
HCD710ABS [†]	RIDE	22.70 (57.7)	24.50(62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	115/60/1	190 (87)	\$15,740
HCE710ABT ²	Top mount	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A - SC	230/50/1 ²	190 (87)	\$15,120
HCE710ABS ²	RIDE	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	230/50/1 ²	190 (87)	\$15,950

[†] ENERGY STAR* certified.

Horizon Elite Chewblet ice machines for countertop ice and beverage dispensers – 710 series

Top mount ice machines require stainless steel top kit, sold separately. See top kit charts on page 47.

RIDE ice machines that automatically fill countertop ice and beverage dispensers, no stainless steel top required*. All parts required for installation are included with the ice machine. Refer to specification sheet, form#8225, for approved applications. See page 48 for approved dispensers.

RIDE rice machines include 10' (3 m) of insulated ice transport tube. For additional tube lengths, see page 47. Maximum run length of ice transport tube is 75' (22.9 m).


All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required.

Micro Chewblet ice – For smaller Chewblet ice (approximately 3/8" long), replace second character of Horizon Elite number with "M". Example HCD710AHT becomes HMD710AHT. Add \$235 to list price.

For additional product information, request form# 8225

Accessory for models ending in HS and HT List price

See page 49 for additional accessory information.



Top mount	RIDE model

Production capacity

	ib (kg)									
Item number	Configuration	Width in (cm)	Depth in (cm)	Height in (cm)	90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)	Condensing unit ¹	Voltage	Approx. ship wt lb (kg)	List price
710 series										
HCD710AHT [†]	Top mount	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A - SC	115/60/1	190 (87)	\$14,915
HCD710AHS [†]	RIDE	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	115/60/1	190 (87)	\$15,740
HCE710AHT ²	Top mount	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A - SC	230/50/1 ²	190 (87)	\$15,120
HCE710AHS ²	RIDE	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	230/50/1 ²	190 (87)	\$15,950

[†] ENERGY STAR* certified.

¹ Condensing unit: A - SC = Air - self-contained

² Models not for use in the United States.

^{*} Coca-Cola Freestyle and Pepsi Spire 3.0 and 5.0 require top kit, see "Top kits for Horizon Elite 710 series ice machines for use with countertop ice and beverage dispensers" on page 48.

¹ Condensing unit: A - SC = Air - self-contained

² Models not for use in the United States.

Approved for RIDE model – ice and beverage dispensers manufactured by others ¹							
Coca-Cola Freestyle 7000 ² / 7100 ^{2,3} / 9000 ² / 9100 ²	Follett Symphony Plus™ 110CM	Pepsi Spire 3.0 ⁴ / 5.0 ⁴ / 4.1 ⁴	Servend SV250				
Cornelius DB/DF/ED150BC Series	Lancer 4500-22N	Servend MD150					
Cornelius DB/DF/ED175BC Series	Lancer 4500-30N	Servend MD175					
Cornelius DB/DF/ED200BC Series	Lancer FS-16N	Servend MD200					
Cornelius DB/DF/ED250BC Series	Lancer FS-22N	Servend MD250					
Cornelius DB/DF/ED300BC Series	Lancer FS-30N	Servend MDH302					
Cornelius IDC215/255 and Pro Fast Gate	Lancer FS-44N	Servend MDH402					
Cornelius IDC Pro	Lancer Sensation/TouchPoint	Servend SV175					
Cornelius Flavor Fusion/Overload	Lancer Bevariety	Servend SV200					

All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required. See table below for table of approved dispensers for top mount ice machines.

Top kits for Horizon Elite 710 RIDE ice machines for use with countertop ice and beverage dispensers

Top kit accessory item number	Ice machine model	Dispenser	Dispenser model number	Dispenser series width	List price		
Required Horizon Elite series RIDE model stainless steel adapter kits ¹							
HSF26SC ²	Available for all models	Coca-Cola	Freestyle 9100	26"	\$560		
MSP24SC ³	that end in HS.	Pepsi	Spire 3.0	24"	\$530		
MSP30SC ³	Example: HCC1010AHS	Pepsi	Spire 5.0	30"	\$560		

¹ All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required. See table below for table of approved dispensers for top mount ice machines.

Ice transport tube

Insulated polywire transport tube for RIDE ice machine installations requiring more than the standard 10' (3 m) length.

Item number	Description	List price
01252477	Ice transport tube kit, 15 ft (4.6 m)	\$330
01252485	Ice transport tube kit, 20 ft (6.1 m)	\$670
01252493	Ice transport tube kit, 30 ft (9.2 m)	\$1,340
01252501	Ice transport tube kit, 40 ft (12.2 m)	\$2,000
01252519	Ice transport tube kit, 50 ft (15.3 m)	\$2,660
01252527	Ice transport tube kit, 60 ft (18.3 m)	\$3,330
01413053	Ice transport tube kit, 75 ft (22.9 m)	\$4,000
01252543	Ice transport tube kit, 100 ft (30.5 m)	\$5,990

² Consult with Coca-Cola and Follett to qualify application prior to ordering.

³ Top kit MSF30SC required with Coca-Cola Freestyle 7100. Top adapter IC Code 46751 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

ARIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

² Consult with Coca-Cola and Follett to qualify application prior to ordering.

³ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

Top kits for Horizon Elite 710 series ice machines for use with countertop ice and beverage dispensers

Top kit accessory item number	Ice machine model series	Dispenser manufacturer	Dispenser model number	Dispenser series width	Installation orientation – <u>F</u> ront or <u>B</u> ack ¹	List price	Specification sheet form number
Horizon top mount applic	cations – 22 - 44 inch d	ispensers ²					
H22F24-F ^{3,4}	710A	Coca-Cola	Freestyle 9000	24"	F only	\$985	8225
H22F26-F ³	710A	Coca-Cola	Freestyle 9100	26"	F only	\$985	8225
H22F30-F ^{3,5}	710A	Coca-Cola	Freestyle 7000	30"	F only	\$1,190	8225
H22F30-F 3, 7	710A	Coca-Cola	Freestyle 7100	30"	F only	\$1,190	8225
H22C22-F	710A	Cornelius	DB/DF/ED150 series	22"	F only	\$970	8225
H22C24-F	710A	Cornelius	DB/DF/ED175 series	24.5"	F only	\$985	8225
H22C30-F	710A	Cornelius	DB/DF/ED200 series	30"	F only	\$1,190	8225
H22C30-X ⁸	710A	Cornelius	DB/DF/ED200 series	30"	F and B	\$1,110	8225
H22C30-F	710A	Cornelius	DB/DF/ED250 series	30"	F only	\$1,190	8225
H22C30-X ⁸	710A	Cornelius	DB/DF/ED250 series	30"	F and B	\$1,110	8225
H22C30-F-FF	710A	Cornelius	Flavor Fusion/Overload	30"	F only	\$1,580	8225
H22C30-F-IDC	710A	Cornelius	IDC 215/255 and Pro Fast Gate	30"	F only	\$1,580	8225
H22C30-X-PRO	710A	Cornelius	IDC Pro	30"	F and B	\$795	8225
H22C44	710A	Cornelius	DB/DF/ED300 series	44"	F or B	\$1,365	8225
H22L22-F	710A	Lancer	FS-22N	22"	F only	\$970	8225
H22L30-F	710A	Lancer	4500-30N	30"	F only	\$1,190	8225
H22L30-F	710A	Lancer	FS-30N	30"	F only	\$1,190	8225
H22L30-F-STP	710A	Lancer	Bevariety	30"	F only	\$1,190	8225
H22L30-F-STP	710A	Lancer	30" Sensation/Touchpoint	30"	F only	\$1,190	8225
H22L44-F-STP	710A	Lancer	44" Sensation	44"	F only	\$1,190	8225
H22P24-F ⁹	710A	Pepsi	Spire 3.0	24"	F only	\$985	8225
H22P30-F ⁹	710A	Pepsi	Spire 5.0 / 4.1	30"	F only	\$1,190	8225
H22S30-F	710A	Servend	SV200	30"	F only	\$1,100	8225
H22S44	710A	Servend	MDH-302	44"	F or B	\$1,365	8225
H22S60	710A	Servend	MDH-402	60"	DF, DB	\$1,645	8225
H22S60	710A	Servend	MDH-402	60"	RF, LF, RB, LB	\$1,190	8225

¹ Installation orientations available:

Note: For any other installation orientations, contact factory.

Specification

DF – 2 front facing Horizon Elite ice machines

LF – 1 Horizon Elite ice machine - left side - front facing

RB –1 Horizon Elite ice machine - right side - back facing

RF – 1 Horizon Elite ice machine - right side - front facing

DB – 2 back facing Horizon Elite ice machines

LB – 1 Horizon Elite ice machine - left side - back facing

 $^{^2}$ All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required.

³ Consult with Coca-Cola and Follett to qualify application prior to ordering.

⁴Adapter must also be ordered from Coca-Cola. IC Code: 46010 (Silver), 46011 (Red) or 46012 (Black).

⁵Top adapter IC Code 46412 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁶ Top adapter IC Code 46753 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁷Top adapter IC Code 46751 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁸ Top designed with flexibility to accommodate front or back mounting.

⁹ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

Ice machine accessories

Water treatment accessories for ice machines

Item number	Description	List price
Follett bacterial	-retentive filter system	
01233659	Bacterial-retentive filter system	\$1,150
01244615	Replacement filter kit for bacterial-retentive filter system	\$480
01233717	1 micron absolute rated pre-filter cartridge	\$110
01288034	Scale inhibitor pre-filter kit for bacterial-retentive filter system	\$400
01288042	Carbon with scale inhibitor pre-filter kit for bacterial-retentive filter system	\$400
01288067	Replacement filter for scale inhibitor pre-filter kit	\$160
01288059	Replacement filter for carbon and scale inhibitor pre-filter kit	\$160
Carbonless high	capacity filter system	
01050442	Carbonless high capacity water filter system (one per ice machine) – Horizon Elite and Maestro Plus series ice machines	\$1,160
01050426	Carbonless high capacity water filter cartridge – primary, single	\$280
01050434	Carbonless high capacity water filter cartridge – primary, carton of 6	\$1,340
00130211	Water pre-filter cartridge – pre-filter, single	\$100
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$390
Standard capac	ity carbon filter system	
00130229	Water filter system (one per ice machine) – Maestro Plus series ice machines	\$1,090
00130245	Water filter cartridge – primary, single	\$250
00954297	Water filter cartridge – primary, carton of 6	\$1,140
00130211	Water pre-filter cartridge – pre-filter, single	\$100
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$390
High capacity ca	arbon filter system	
00978957	High capacity water filter system (one per ice machine) – Horizon Elite series ice machines	\$1,300
00978965	High capacity water filter cartridge – primary, single	\$450
00978973	High capacity water filter cartridge – primary, carton of 6	\$2,200
00130211	Water pre-filter cartridge – pre-filter, single	\$100
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$390

Cleaning and sanitizing accessories for ice machines

Item number	Description	List price
01147826	SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (1 x 8 oz bottle)	\$70
01149954	SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (6 x 8 oz bottles)	\$170
01149962	SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (carton of 24 x 8 oz bottles)	\$510
00979674	Nu-Calgon IMS-III sanitizer, single 16 oz bottle	\$70
01038652	Nu-Calgon IMS-III sanitizer, case of 12 x 16 oz bottles	\$380

Other accessories for ice machines

Item number	Description	List price
01068477	Slide-out ice machine accessory for air- and water-cooled ice machines (Harmony applications only) – allows air- and water-cooled RIDE model Maestro Plus 425 series ice machine to slide-out without disconnecting utilities	\$1,410
AFWALLMTBRKT	Wall mount bracket for Maestro Plus 425 series RIDE model ice machines	\$500
00997098	Wall mount bracket for Horizon Elite 710 series RIDE model ice machines	\$670
AFR400STND	Ice machine stand for Maestro Plus 425A/W series – height adjustable from 6.80" (17.27 cm) to 8.30" (21.08 cm)	\$1,040
00997080	Ice machine stand for Horizon Elite 710 series – height adjustable from 6.80" (17.27 cm) to 8.30" (21.08 cm)	\$1,050

Ice storage, ice transport and ice handling

Follett offers ice storage, dispensing and transport solutions in capacities and sizes to meet nearly every need. All with features that can make your ice management easier, safer, and more sanitary than you ever thought possible. Please visit www.follettice.com for more bin models than listed here.

Warranty

Slope front bins

Follett Products, LLC warrants to the original end user that the cabinet exterior, including the top and trim, and the interior liner will be free of corrosion for 3 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for corrosion repair within this 3 year period are covered under this warranty.

All other integral components are covered against defects in material and workmanship under normal use and service for 2 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 2 year period are covered under this warranty. For products sold outside of the U.S., the labor warranty will apply only to equipment sold and serviced through a Follett Authorized Distributor in its designated territory.

Removal of ice machine to service bin and any labor costs incurred are expressly excluded from this warranty.

WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett. All 3rd party ice machines must be installed and operated in accordance with the manufacturer's instructions.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond Follett's control are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.

This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship. Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.

Slope front bins

Small to medium capacity ice storage bins. Bin exterior for all models includes stainless steel front and sides. Bin interior includes polyethylene-lined walls and stainless steel bottom. All bins include stainless top, which is custom cut for ice machine(s) and 6.00" (15.24 cm) plastic adjustable legs.

For additional product information, request form# 9135.



Slope front bin

Item number †	Max. bin cap. lb (kg)	Width in (cm)	Depth in (cm)	Height w/ legs in (cm)	Req'd door access in (cm)	Approx. ship wt lb (kg)	List price
300-22 ¹	300 (136)	22.00 (55.9)	31.50 (80.0)	40.00 (101.6)	23.00 (58.4)	120 (54)	\$3,315
425-30	430 (195)	30.00 (76.2)	31.50 (80.0)	40.00 (101.6)	31.00 (78.7)	144 (65)	\$4,610
650-44	660 (299)	44.00 (111.8)	31.50 (80.0)	40.00 (101.6)	32.00 (81.2)	178 (81)	\$6,375
950-48	950 (431)	48.00 (121.9)	31.50 (80.0)	50.00 (127.0)	32.00 (81.2)	207 (94)	\$6,535
1025-52	1030 (467)	52.00 (132.1)	31.50 (80.0)	50.00 (127.0)	32.00 (81.2)	217 (98)	\$6,715

[†] Purchase orders must clearly indicate the make and model of the ice machine(s) being used with the bin to properly prepare the bin top. Lack of this information will result in a delay in order processing.

Replacement stainless steel tops for slope front bins

Order must include complete model number of ice machine to be used in conjunction with bin.

Bin model	Width in (cm)	Depth (at top) in (cm)	Replacement top item number	Approx. ship wt lb (kg)	List price
425-30	30.00 (76.2)	27.50 (69.8)	AB425TOP00	36 (16)	\$1,150
650-44	44.00 (111.8)	27.50 (69.8)	AB650TOP00	45 (20)	\$1,560
950-48	48.00 (121.9)	27.50 (69.8)	AB725TOP00	70 (32))	\$1,710
1025-52	52.00 (132.1)	27.50 (69.8)	AB750TOP00	72 (33)	\$1,820

¹ Model 300-22 only for use with Follett® Maestro Plus 425 and Horizon Elite 710 series ice machines. Additional bin types available. Contact factory.

Incoterms is a trademark of the International Chamber of Commerce.

ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency.

Pyxis is a registered trademark of CareFusion in the United States and other countries.

Omnicell is a registered trademark of Omnicell, Inc. in the United States.

medDISPENSE is a registered trademark of InterMetro Industries Corp. in the United States and other countries.

EDGE SERIES, HORIZON ELITE, INFINITY SERIES, MAESTRO PLUS, MICRO CHEWBLET, SAFECLEAN PLUS, SANISPONGE, SENSNORSAFE, and SYMPHONY PLUS are trademarks of Follett Products, LLC.

CHEWBLET, FOLLETT, FOLLETT HEALTHCARE and RIDE are registered trademarks of Follett Products, LLC, registered in the US.

