

Champion™ 7 undercounter ice and water dispenser

Chewblet® ice machine



4.3" touch display
with touch free dispensing



Optional
hot water



Features

Compact size, only 14.62" (37.1 cm) wide and 22.38" (56.8 cm) depth to fit under standard counters

ADA model fits under 34.00" (86.4 cm) counters

7 lb (3.2 kg) ice storage capacity

Optional fast recovery hot water (115/60 models only)

Integral air-cooled ice machine with up to 100 lb (45.4 kg) daily production of popular Chewblet ice

- serves up to 50 people in 9 hours¹
- soft, chewable, compressed nugget ice is preferred over cubes²
- environmentally responsible refrigerant, R513A (115 V) and R290 (230 V) with zero ozone depletion potential and low GWP
- energy saving sleep mode
- quiet production without noisy harvest cycles

Durable, attractive dispenser

- modern styling with updated look
- 4.3" LCD capacitive touch display
- easy-to-clean, removable 20 oz (591 ml) drip tray

4.3" LCD capacitive touch display

- touchless dispensing
- advanced alerts and self-diagnostics
- on-screen ice machine cleaning and sanitizing instructions
- self-help menu support
- user-selectable language in English, Spanish and French
- component performance data available to servicers for quick and accurate diagnosis
- IoT ready for remote diagnostics to maximize uptime (separate subscription required)

Antimicrobial Shield product protection³

- Clean light actively keeps the dispense area clean
- Internal UV light improves cleanliness of water reservoir
- touch free dispensing
- Agion® silver-based antimicrobial product protection of key ice and water contact components⁴

Claris ion exchange scale-inhibiting filters factory supplied for optimum performance in most water conditions

- increases length in between cleanings
- improves equipment life
- models with no filter are only available for applications with RO or ion exchange filtration already in place
- note: does not filter water dispense for increased filter life

Installation

- comes fully assembled
- two easy connections – electric and push-in water connection
- drainless design allows dispenser to be placed anywhere a water line can be run and eliminates the cost of a drain installation

Certifications (applied to all products unless otherwise noted)



115 V models 230 V models

801 Church Lane | Easton, PA 18040, USA
1.800.523.9361 | 1.610.252.7301 | follettice.com



| Model configurations | | | | |
|--|--|-----------------|-----------------------------|-----------------------------|
| Ice storage capacity | Config./ Height | Filter | Voltage V/Hz | Item number |
| 7 lb (3.2 kg) | ice and water / 33.50" (85.1 cm) | no filter | 115/60 | 7UC112A-IW-NF-ST-00 |
| | | | 230/50 | E7UC114A-IW-NF-ST-00 |
| | | internal Claris | 115/60 | 7UC112A-IW-CL-ST-00 |
| | | | 230/50 | E7UC114A-IW-CL-ST-00 |
| | ice and water / 31.50" (80.0 cm) for ADA applications | no filter | 115/60 | 7UD112A-IW-NF-ST-00 |
| | | | 230/50 | E7UD114A-IW-NF-ST-00 |
| | | internal Claris | 115/60 | 7UD112A-IW-CL-ST-00 |
| | | | 230/50 | E7UD114A-IW-CL-ST-00 |
| | ice, water and hot water / 33.50" (85.1 cm) | no filter | 115/60 | 7UC112A-HW-NF-ST-00 |
| | | | 230/50 | N/A |
| | | external Claris | 115/60 | 7UC112A-HW-CL-ST-00 |
| | | | 230/50 | N/A |
| | ice, water and hot water / 31.50" (80.0 cm) for ADA applications | no filter | 115/60 | 7UD112A-HW-NF-ST-00 |
| | | | 230/50 | N/A |
| external Claris | | 115/60 | 7UD112A-HW-CL-ST-00 | |
| | | 230/50 | N/A | |
| ice-only / 33.50" (85.1 cm) | no filter | 115/60 | 7UC112A-NW-NF-ST-00 | |
| | | 230/50 | E7UC114A-NW-NF-ST-00 | |
| | internal Claris | 115/60 | 7UC112A-NW-CL-ST-00 | |
| | | 230/50 | E7UC114A-NW-CL-ST-00 | |
| ice-only / 31.50" (80.0 cm) for ADA applications | no filter | 115/60 | 7UD112A-NW-NF-ST-00 | |
| | | 230/50 | E7UD114A-NW-NF-ST-00 | |
| | internal Claris | 115/60 | 7UD112A-NW-CL-ST-00 | |
| | | 230/50 | E7UD114A-NW-CL-ST-00 | |

NOTE: For use in applications with greater than 10 mg/l but less than 400 mg/l total dissolved solids in water and less than 100 mg/l hardness (either naturally occurring or treated with reverse osmosis or other hardness reducing technology).

Not recommended for use with softened water.



Options and accessories

- SafeCLEAN Plus™ ice machine cleaner (refer to form# 8295)
- Filter cartridge, replacement Claris (item# 01548635)
- Three year remote monitoring subscription and hardware for Open Kitchen (item# MDD-1003)
- Additional water treatment and other accessories (refer to form# 4025)

Specification

| | |
|--|---|
| Ice storage capacity | 7 lb (3.2 kg) |
| W1 Width | 14.62" (37.1 cm) |
| D1 Depth | 22.38" (56.8 cm) |
| D2 Kick recess depth | 3.88" (9.86 cm) |
| H1 Height – 7UC/E7UC | 33.50" (85.1 cm) |
| H1 Height – 7UD/E7UD | 31.50" (80.0 cm) |
| H2 Kick recess height | 4.00" (10.16 cm) |
| H3 Dispense height clearance | 9.20" (23.37 cm) |
| Ventilation clearance | 6.00" (15.24 cm) front of machine |
| Service clearance | 3.00" (7.62 cm) behind |
| C1 115 V/60/1, 230 V/50/1 electrical – Includes 8' (2.4 m) cord | 115 V – 3.8 amps (hot water models – 6.0 amps) 230 V – 2.0 amps Connect to dedicated 15 amp circuit, fuse or breaker. |
| C2 Water inlet | 1/4" push-in |
| C3 Factory equipped external water filter connection | (2) 1/4" push-in (in and out) (hot water models only) |
| Air temperature | 50 - 100 F (10 - 38 C) |
| Water temperature | 40 - 90 F (4 - 32 C) |
| Water pressure | 10 - 70 psi (69 - 482 kpa) |
| Ice production at 70 F (21 C) air and 50 F (10 C) water | 100 lb (45.4 kg) |
| Ice production at 90 F (32 C) air and 70 F (21 C) water | 90 lb (40.9 kg) |
| Energy efficiency at 90 F (32 C) air and 70 F (21 C) water | 6.21 kWh per 100 lb of ice |
| Water consumption | 12 gal (45.4 L) of potable water per 100 lb (45.4 kg) of ice |
| Refrigerant | R513A – 115 V, R290 – 230 V |
| Approximate net weight/ shipping weight – | 74 lb (34 kg)/ 90 lb (40.9 kg) |
| NOTE: Intended for commercial use only. Follett can't guarantee freight carrier's ability to deliver to residential locations. Follett service providers may not be bonded to perform on-site warranty repairs in certain areas. | |

Dimensional drawing

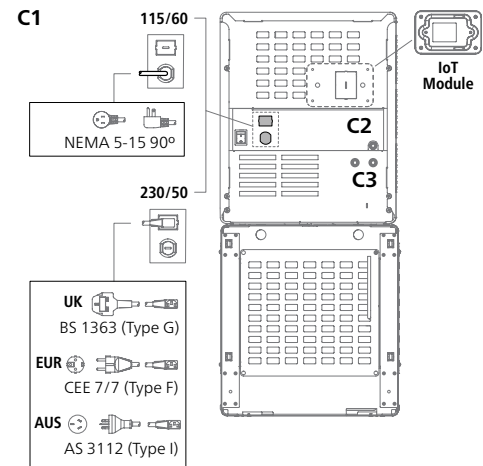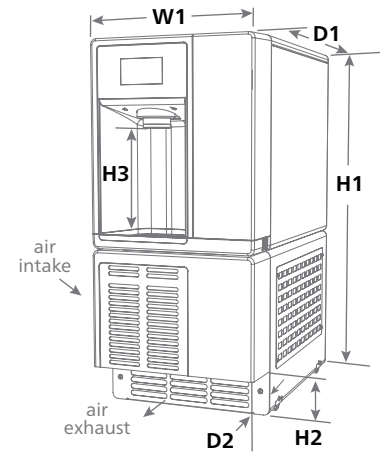

SHORT FORM SPECIFICATION: (Choose one) ___ ice and water or ___ ice and water and hot water (115 V only) ___ or ice-only dispenser to be Follett automatic load in undercounter configuration, with 7 lb (3.2 kg) of storage. (Choose one) ___ 115 V ___ 230 V power. Environmentally responsible R513a (115 V) or R290 (230 V) ice machine to be air-cooled. Ice machine to produce approximately 100 lb (45.4 kg) of Chewblet compressed nugget ice at air temperature of 70 F (21 C) and water temperature of 50 F (10 C) (115 V). Ice machine to be equipped with onboard diagnostics including amp trace graph to allow simplified servicing and with capacitive touch user interface and touchless dispensing. Storage area to be insulated with CARB compliant non-HFC foam. 8' (2.4 m) cord and plug provided. NSF and UL listed (115 V). CE certified (230 V) For use in applications with greater than 10 mg/l but less than 400 mg/l total dissolved solids in water and less than 100 mg/l hardness.

¹ 4 oz (118 ml) of ice in a 12 oz (355 ml) cup.

² Independent third party studies. Contact Follett for details.

³ In conjunction with recommended cleaning process.

⁴ Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice. Agion only in 115 V models.

⁵ Certifications do not apply to options and accessories.

Claris is a registered trademark of the Aquis GmbH in Switzerland.

Agion is a registered trademark of Sciessent LLC.

CHAMPION and SAFECLEAN PLUS are trademarks of Follett Products, LLC.

CHEWBLET and FOLLETT are registered trademarks of Follett Products, LLC, registered in the US.

Follett reserves the right to change specifications at any time without obligation.

Certifications may vary depending on country of origin.

Champion 7 undercounter ice and water dispenser