



Features

- 15.00" (38.1 cm) wide ice machine
- Factory-installed drain pump standard on all models
- ADA model fits under 34.00" (86.4 cm) counters
- Best-in-class ice production and storage capacity
 - up to 90 lb (40.8 kg) daily production of consumer-preferred Chewblet® ice
 - 30 lb (13.6 kg) ice storage capacity
 - enough ice for larger offices (up to 75 people)
 - environmentally responsible - features natural R600a refrigerant with zero ozone depletion potential
 - ENERGY STAR® certified
 - fast and simple semi-automatic cleaning process
 - optional, EZ-access carbon filter reduces chlorine and filters out scale, dirt, and particles down to 5 microns

Attractive design

- stainless steel exterior, door, toe-kick, and full length handle
- can be used undercounter or freestanding
- field reversible door
- white interior
- bright white LED lighting
- leveling legs, adjustable up to 1.00" (2.54 cm)

Installation

- comes fully assembled
- integrated drain pump is factory installed
- complete installation and service manual included

Warranty

- 2 years parts and labor, 5 years compressor parts

Accessories

- Filter cartridge, replacement 5 micron particle/carbon (item# 00968107)
- SafeCLEAN Plus™ ice machine cleaner
 - 1 x 8 oz (237 ml) bottle (item# 01147826)
 - 6 x 8 oz (237 ml) bottles (item# 01149954)
 - Carton of 24 x 8 oz (237 ml) bottles (item# 01149962)

Model configurations				
Ice storage capacity	Height	Filter ¹	Drain Pump	Item number
30 lb (13.6 kg)	34.12" (86.7 cm)	No	Yes	UCD100A30-NF
		Yes	Yes	UCD100A30-CF
	32.00" (81.3 cm) for ADA applications	No	Yes	UCD100A30ADA-NF
		Yes	Yes	UCD100A30ADA-CF

¹ Internal filter is a 5 micron particle and carbon filter.

Job _____
Item _____


Specification

Ice storage capacity	30 lb (13.6 kg)
W1 Width	14.96" (38.0 cm)
D1 Depth without handle	22.56" (57.3 cm)
D2 Depth including handle	24.38" (61.9 cm)
D3 Kick recess depth	3.88" (9.86 cm)
H1 Height – Standard model	34.12" to 35.12" (86.7 cm to 89.2 cm)
H1 Height – ADA model	32.00" to 33.00" (81.3 cm to 83.8 cm)
H2 Kick recess height	3.50" (8.89 cm)
Ventilation clearance	do not obstruct front grille air flow
Service clearance	2.00" (5.08 cm) behind
C1 115 V/60/1 electrical	2 amps. Connect to dedicated 15 amp circuit, fuse or breaker. 6' (1.8 m) cord with 90° rounded type B plug.
C2 Water inlet	1/4" compression
C3 Drain	3/8" braided drain hose (8' (2.4 m) provided)
Air temperature	50 - 100 F (10 - 38 C)
Water temperature	40 - 90 F (4 - 32 C)
Water pressure	10 - 70 psi (69 - 482 kpa)
Ice production at 70 F (21 C) air and 50 F (10 C) water	90 lb (40.8 kg)
Ice production at 90 F (32 C) air and 70 F (21 C) water	65 lb (29.5 kg)
Heat rejection	1700 BTU/hr
Energy consumption 90 F (32 C) air and 70 F (21 C) water	10 kWh per 100 lb (45.4 kg) ice
Water consumption	12 gal (45.4 L) of potable water per 100 lb (45.4 kg) of ice
Approximate net weight	89 lb (40 kg)
Approximate shipping weight	101 lb (46 kg)

NOTE: Intended for commercial use only. Follett can't guarantee freight carrier's ability to deliver to residential locations. Follett service providers may not be bonded to perform on-site warranty repairs in certain areas.

SHORT FORM SPECIFICATION: (Choose one) _____ 34.12" (86.7 cm) tall undercounter ice machine bin or _____ 32" (81.3 cm) tall ADA undercounter ice machine bin, with 30 lb (13.6 kg) of ice storage. Factory installed drain pump standard on all models. Environmentally responsible R600a ice machine to be air-cooled. Ice machine to produce approximately 90 lb (40.8 kg) of Chewblet compressed nugget ice at air temperature of 70 F (21 C) and water temperature of 50 F (10 C). Stainless steel exterior, door, toe-kick, and full length door handle standard. White interior with bright white LED lights. 6' (1.8 m) cord and plug provided 115V/60/1. NSF and UL listed.

Dimensional drawing

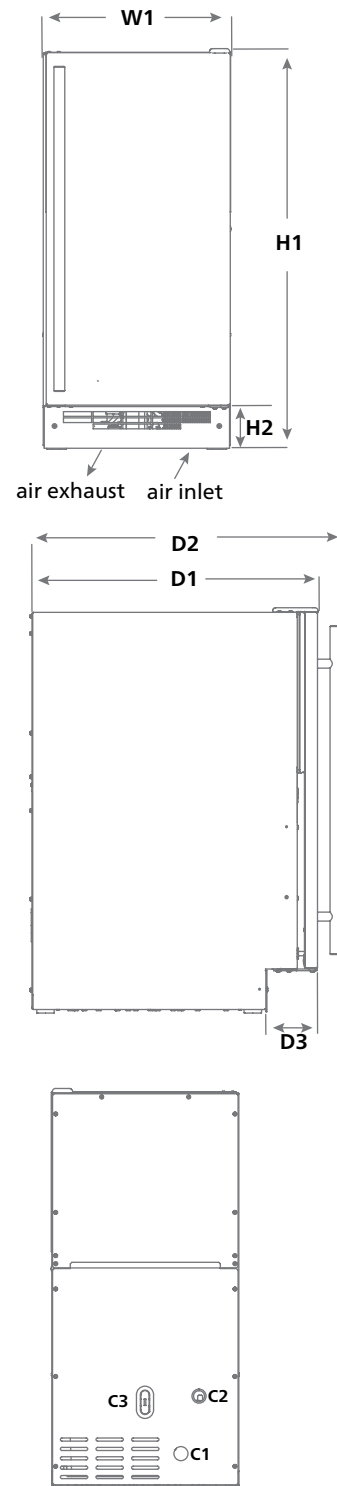

ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency.

SAFECLEAN PLUS and TEMPO are trademarks of Follett LLC.

CHEWBLET and FOLLETT are registered trademarks of Follett LLC, registered in the US.

Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

Tempo undercounter ice machine bin