



Model E-SG1010-48 shown

Single door upright

ice storage bins

Features

Five models available in widths from 76.2 cm to 152.4 cm (30.00" to 60.00") and capacities from 209 kg to 754 kg (460 lb to 1660 lb).

Designed for safer and more sanitary ice access

- industry exclusive SmartGATE® ice shield controls the flow of ice to reduce spills and limit contact with ice
- locks in three positions and returns easily to full down position even when bin is full
- better access to break ice bridging
- no bending into bin means more sanitary ice removal with scoop or shovel

Fresher ice

- first ice in is first ice out

Durable, user friendly construction

- corrosion-resistant poly bin liner, top and trim
- heavy duty "stay-open" PowerHinge™ door hinge – easy one hand open and close without door catches
- molded-in gasket never needs to be replaced
- translucent double-wall poly windows

Easy installation

- comes assembled, simply screw in legs
- easily remove front door assembly (4 screws, no sealant)

Includes:

- custom-cut stainless top
- 15.24 cm (6.00") adjustable stainless legs

Accessories

- SmartCART™ 75 ice cart (item# 00112771)
- Ice paddle and hanging bracket (item# ABICEPADDL46)
- Plastic ice shovel (item# ABICESHOVEL)
- Plastic ice scoop, 82 oz (item# ABICESCOOP)
- 25.4 cm (10.00") stainless legs (item# 00151547)
- Additional carts and accessories (refer to form# 3435)

Industry exclusive SmartGATE ice shield



Job

Item

Follett Europe Polska Sp. z o.o.
Mokry Dwór 26C 83-021 Wiślna, Poland
+48 (58) 785-6140 | Fax: +48 (58) 785-6159
folletteurope.com

801 Church Lane | Easton, PA 18040, USA
1.610.252.7301 | Fax: +1.610.250.0696 | follettice.com

FOLLETT®


Specification

Maximum bin capacity ¹	see model table below
W1 Width	see model table below
D1 Depth	78.7 cm (31.00")
D2 Depth with lower door assembly (easily removed for installation access)	99.1 cm (39.00")
D3 Depth with door fully extended	125.7 cm (49.50")
H1 Height (adjustable)	see model table below
Required door access	see model table below
L1 Drain ²	1.00" FPT, center of bin bottom
Shipping weight	see model table below

NOTE: For indoor use only

SHORT FORM SPECIFICATION: Ice storage bin to be Follett® model _____ with industry-exclusive SmartGATE ice shield. Bin to hold approximately _____ kg (lb) of ice. Construction to be welded steel shell and frame. Exterior finish to be stainless steel back and bottom. Bin liner to have non-corroding polyethylene walls and stainless steel bottom. Bin insulation to be non-CFC polyurethane foam, bonded to shell and liner for added structural strength. Bin top to be stainless steel custom-cut for specific ice machine(s) to be used. Lower door assembly to include non-corroding polyethylene ice door assembly, polyethylene lift door with PowerHinge door hinge to eliminate gasket and latches, and inner SmartGATE ice shield to positively control ice flow into ice door assembly area and reduce spillage. Entire lower door assembly to be easily removable for installation through narrow doors. Upper inspection windows to be of molded double-wall plastic to increase durability and minimize meltage and condensation. Bin to have 15.24 cm (6.00") legs, adjustable to 18.42 cm (7.25"). Bin drain to be 1.00" FPT rigid PVC.

Dimensional drawing

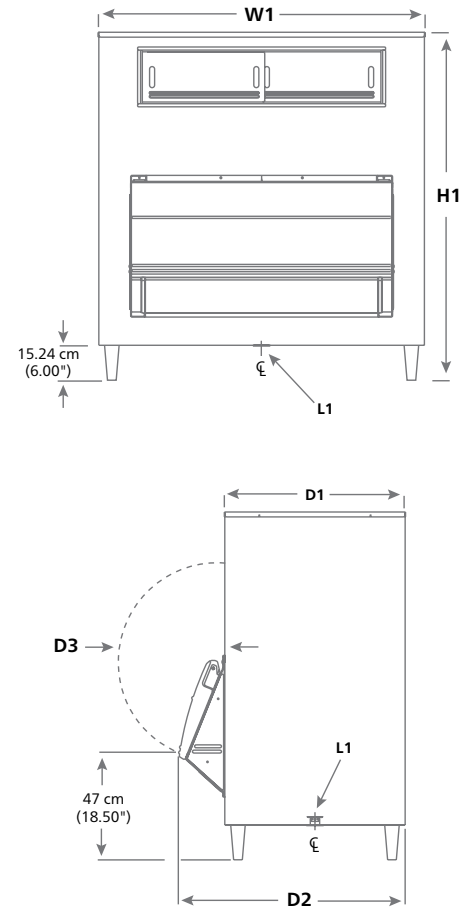

SMARTCART and POWERHINGE are trademarks of Follett LLC.
CHEWBLET, FOLLETT and SMARTGATE are registered trademarks of Follett LLC, registered in the US.
Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

Model	Maximum bin capacity kg (lb) ¹	Cubic volume m (cu ft)	Width - W1 cm (in)	Height ^{3,4} - H1 cm (in)	Required door access ³ cm (in)	Approximate ship weight kg (lb)
E-SG500S-30 ⁵	209 (460)	0.41 (14.8)	76.2 (30.00)	113.0 (44.50)	78.7 (31.00)	80 (176)
E-SG700S-30	308 (680)	0.61 (21.7)	76.2 (30.00)	152.4 (60.00)	78.7 (31.00)	100 (221)
E-SG1010S-48	454 (1000)	0.90 (31.9)	121.9 (48.00)	142.4 (56.00)	81.3 (32.00)	124 (274)
E-SG1160S-56	531 (1170)	1.06 (37.3)	142.2 (56.00)	142.4 (56.00)	81.3 (32.00)	140 (309)
E-SG1325S-60	602 (1325)	1.19 (42.0)	152.4 (60.00)	142.4 (56.00)	81.3 (32.00)	147 (324)
E-SG1475S-60	676 (1490)	1.34 (47.4)	152.4 (60.00)	157.5 (62.00)	81.3 (32.00)	148 (326)
E-SG1650S-60	754 (1660)	1.50 (52.8)	152.4 (60.00)	165.1 (65.00)	81.3 (32.00)	157 (346)

Notes:

¹ Computed on cubic volume of bin. Does not reflect voids that can occur due to pyramiding.

² Follett recommends installation of a floor drain with grate with all ice storage bins.

³ Required clearance for installation access through doors (may require removal of door assembly).

⁴ Special top required for ice machines weighing more than 454 kg (1000 lb). Add 1.27 cm (0.5") to height. Contact factory.

⁵ SG500S-30 does not have upper inspection window.

E-SG Series

Follett Europe Polska Sp. z o.o.
Mokry Dwór 26C 83-021 Wiślnia, Poland
+48 (58) 785-6140 | Fax: +48 (58) 785-6159
folletteurope.com

801 Church Lane | Easton, PA 18040, USA
1.610.252.7301 | Fax: +1.610.250.0696 | follettice.com

FOLLETT®