

REF45 Upright

double door pharmacy refrigerators



Features

Powerful refrigeration system and superior plenum air distribution

- modular refrigeration system with microprocessor controller provides a ± 1 C (1.8 F) performance throughout
- industry-exclusive center plenum air distribution delivers cold air to both sides at six different levels
- auto-evaporating condensate

User-friendly interface

- 7" LCD capacitive touchscreen digital temperature display available in user-programmable C or F
- integral event and data logging with easy downloading via convenient USB port

Protection for your valuable products

- audible and visual high/low temperature, door open, power failure, low battery alarms
- dry contacts for remote alarming

Superior slides for easy, trouble-free rolling

- twelve (six per side) full-extension epoxy-coated baskets
- stainless steel roller bearings and S-track design eliminate binding and uneven wear
- baskets and slides lift out without tools for easy cleaning
- track/basket interface minimizes risk of catching product tubing in slides

Full stainless steel cabinet and high quality components

- full stainless steel interior and exterior provide resistance to rust and corrosion
- quick-connect RTD product temperature probe easily accessible inside storage cabinet
- dished stainless floor contains spills for easy clean up
- heavy-duty dual casters roll easily and lock securely
- 2.75" (6.98 cm) of CARB compliant non-HFC foam throughout


Heavy-duty door for ease of use and energy savings

- dual-pane glass door or solid stainless door with ADA-compliant full length locking handle
- energy efficient low-E glass coating to reduce energy loss by 30 - 50% compared to non-coated glass
- glass remains condensation-free to 27 C (80 F) at 60% RH and eliminates need for heated doors in most applications
- self-closing hinges lock open at 90 degrees for easy product loading

Cool, energy-efficient LED lights

- full length LED light bars illuminate all baskets
- instant-on LEDs eliminate delay of fluorescent lights and deliver longer life
- energy-efficient LEDs allow products to be placed next to lights
- auto on with door opening; ON/OFF front panel switch

| Model configurations | | | | | |
|----------------------|---------|-------------|--------|-----------------|------------------------|
| Storage system | Hinging | Heated door | Keypad | Door style | Item number |
| 12 baskets | outer | yes | yes | heated glass | REF45-PH-0HTKPG |
| 12 baskets | outer | yes | no | heated glass | REF45-PH-0HT00G |
| 12 baskets | outer | no | yes | glass | REF45-PH-000KPG |
| 12 baskets | outer | no | yes | stainless steel | REF45-PH-000KPS |
| 12 baskets | outer | no | no | glass | REF45-PH-00000G |
| 12 baskets | outer | no | no | stainless steel | REF45-PH-00000S |
| 12 baskets | right | yes | no | heated glass | REF45-PH-RHT00G |
| 12 baskets | right | no | no | glass | REF45-PH-R0000G |
| 12 baskets | right | no | no | stainless steel | REF45-PH-R0000S |
| 12 baskets | left | yes | no | heated glass | REF45-PH-LHT00G |
| 12 baskets | left | no | no | glass | REF45-PH-L0000G |
| 12 baskets | left | no | no | stainless steel | REF45-PH-L0000S |

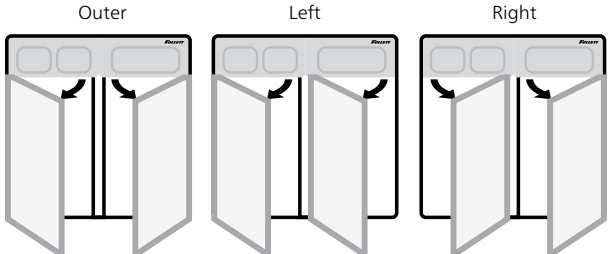

Features (continued)

Warranty

- 2 year parts and labor
 - 5 year compressor parts only
 - optional extended one year warranty (item# EW12)
 - 3 year parts and labor
 - 5 year compressor parts only
 - optional extended three year warranty (item# EW36)
 - 5 year parts and labor
-

Certifications



Commercial Refrigerator
SAFETY US/CA – SA12646

Factory-installed options:

Integral keypad and electronic locking system with keyed access manual override (available on outer-hinged units only)

Keypad integral to touchscreen controls; electronic locking mechanism opens both doors simultaneously

Heated glass door and frame (recommended for ambients above 27 C (80 F), 60% RH)

NOTE: Factory-installed options must be specified at time of order – for details contact factory or your local sales representative.

Accessories

Replacement “quick connect” RTD probe with certificate of NIST-traceable calibration, REF12, REF20/25, REFVAC20/25, REF45 and REFVAC45 before serial number Q86639, FZR20/25 and FZRVAC20/25 (item# 01140458)

Replacement “quick connect” RTD probe with certificate of NIST-traceable calibration, REF45 and REFVAC45 after serial number Q86638 (item# 01540640)

Replacement high-side refrigeration module (complete condensing unit) (item# 01147891)

Pyxis® compatible door bracket, available on one outside handled door of right or left hinged models only (item# 00927202)

Omniceil® compatible door bracket, available on one outside handled door of right or left hinged models only (item# 00966432)

medDISPENSE® compatible door bracket, available on one outside handled door of right or left hinged models only (item# 00978296)

Glycerine, 16 oz (item# 00959296)

Wall bracket kit, seismic anchoring (item# 00927194)

NOTE: Accessories ship separately.

Touchscreen display



“Floating” basket system on PH models



Specification

| | |
|-----------------------|---|
| Nominal capacity | 45 cu ft (1274 L) |
| Ventilation clearance | 16.00" (40.6 cm) top, 2.00" (5.08 cm) back |

Exterior

| | |
|-------------------------------|---|
| W1 Width | 59.75" (151.8 cm) |
| D1 Depth with handle | 33.55" (85.2 cm) |
| H1 Height with casters | 79.54" (202.0 cm) |
| Casters | (6) swiveling dual wheel casters with toe locks |
| D2 Door swing | 59.55" (151.3 cm) |

Interior

| | |
|-----------------------------|---|
| Height | 54.31" (138.0 cm) with upper return panel |
| Lighting | (2) energy efficient full length LED lights |
| Storage system | (12) full-extension epoxy coated baskets |
| Overall basket dimensions | 22.50" W x 24.91" D x 6.38" H (57.2 x 63.3 x 16.21 cm) |
| Inside basket dimensions | 21.75" W x 24.19" D x 5.88" H (55.2 cm x 61.4 x cm 14.94 cm) |
| Space between baskets | 8.00" (20.32 cm) fixed |
| Max. load rating per basket | 110 lb (50 kg) |

Door configurations

| | |
|-------------|--|
| Door | (2) dual-pane glass, argon filled with low-E coating (heated opt) or stainless steel |
| Door lock | cylinder type with one key per door |
| Door handle | ADA-compliant, full length handle |
| Door hinges | torsion rod self-closing with 90° hold open feature |
| Gasket | magnetic dart style (replaceable) |


Electrical

| | |
|--|--|
| Electrical 115 V/60/1 (103 - 132 V) | 12 full load amps, NEMA 5-20P, 90° hospital-grade plug, 9' (2.7 m) cord. |
| Maximum size of branch circuit overcurrent device | 20 amps dedicated circuit |

Controls

| | |
|--------------------------------------|---|
| Temperature display | 7" LCD capacitive touchscreen digital temperature display available in user-programmable C or F |
| 3rd party probe access | soft access port on left side of cabinet |
| Product temperature display probe | (1) quick-connect RTD (± 0.4 C, ± 0.7 F) |
| Temperature probe calibration | top probe calibration in 0.1° increments |
| Password protection PIN | 4 digit password to prevent interface setting/selection changes |
| Date and time | programmable |
| Product simulation bottle size | (1) 125 ml |
| Refrigeration and defrost probes | NTC thermistor type |
| Refrigeration cycle with probe error | factory set at 2 min on, 6 off |
| Programmable operating range | 3.3 to 10 C (38 to 50 F) |
| Factory preset | 3.3 C |

Dimensional drawing

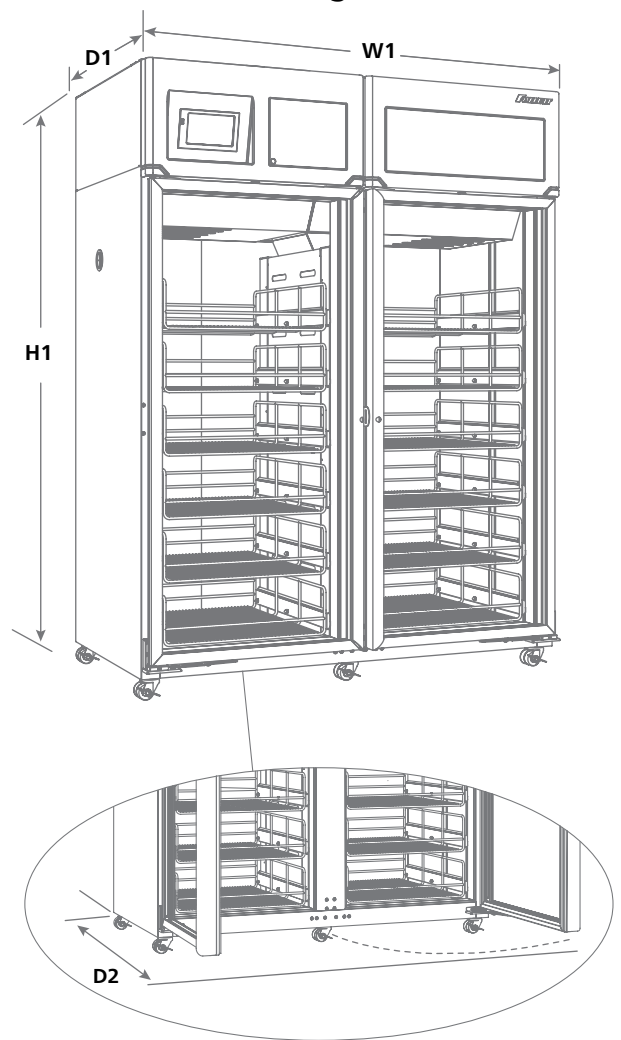

Omniceil is a registered trademark of Omnicell, Inc. in the United States.
Pyxis is a registered trademark of CareFusion in the United States and other countries.
medDISPENSE is a registered trademark of InterMetro Industries Corp. in the United States and other countries.
FOLLETT and FOLLETT HEALTHCARE are registered trademarks of Follett Products, LLC, registered in the US.
Follett reserves the right to change specifications at any time without obligation.

Alarming

| | |
|--|--|
| High and low product temperature alarm (top probe) | audible and visual, user programmable set points in C or F |
| Power failure alarm | audible and visual |
| Door ajar alarm | audible and visual |
| Probe error alarm | audible and visual — product temperature probes, refrigeration and defrost |
| Alarm mute | 10 minute ring-back, adjustable |
| Alarm volume | 0-10 scale |
| Low battery alert | audible and visual |
| Back-up battery status | shows voltage level |
| Min/max temperature log | shows highest and lowest product temperature since last reset occurred |
| Remote contacts | NO/NC standard, located behind front panel |

Data logging

| | |
|-----------------|--|
| Information log | graphs or displays temperature data and displays chronological event data (50,000 data points) |
| Data export | USB export capabilities |

System performance

| | |
|--|--|
| Top-to-bottom temperature consistency | ± 1 C (1.8 F) |
| Refrigeration system | integral top-mounted modules with 1/2 hp compressor and air-cooled condenser |
| Refrigerant and charge | non-CFC R134a refrigerant, 13 oz |
| Air circulation system | ducted air to each storage level through plenum openings |
| Air temperature pull down | 27 to 4 C (80 to 39 F) in 30 minutes |
| Product simulation bottle temperature pull down | 27 to 4 C (80 to 39 F) in 5 h 45 min (to 8 C (46 F) in 1 h 50 min) |
| Energy consumption | 7.4 kWh/day (auto-off defrost) |
| BTU/hr normal heat rejection, includes duty cycle (75 F ambient) | 1480 BTU/hr (434 W) |
| BTU/hr maximum (total) heat rejection, continuous operation (75 F ambient) | 5240 BTU/hr (1536 W) |

Shipping

| | |
|---|---|
| Shipping size | 70.00" W x 48.00" L x 83.00" H (177.8 x 121.9 x 210.8 cm) |
| Approximate refrigeration condenser module net weight | 52 lb (24 kg) |
| Approximate net weight | 750 lb (340 kg) |
| Approximate ship weight | 890 lb (404 kg) |

NOTE: For indoor use only

SHORT FORM SPECIFICATION: Upright double door refrigerator with 45 cu ft of nominal capacity. To include (12) full-extension, epoxy-coated baskets. Environmentally responsible R134a refrigeration system to include top-mounted modules with 1/2 hp compressor and air-cooled condenser. 7" LCD capacitive touchscreen with user selectable C or F. Event and data logging with USB download capability. Air circulation system distributes cold air to both sides at 6 different levels. Storage area to be insulated with CARB compliant non-HFC foam. 9' (2.7 m) power cord with NEMA 5-20 90° hospital-grade plug. UL listed.