



Shown with SensorSAFE

## SensorSAFE infrared dispense



SensorSAFE not recommended for use with clear containers or for applications in direct sunlight

Ice and water dispensers					
Ice storage capacity	Dispense	Ice machine cooling	Voltage V/Hz	Item number	
	Lever	air	220/60	C12CI425A-L	
5.4 kg	Lever	air	230/50	E12CI425A-L	
(12 lb)	SensorSAFE	air	220/60	C12CI425A-S	
	SensorSAFE	air	230/50	E12CI425A-S	

Ice-only available, add -I Example: E12CI425A-LI

Ice production					
Temperatures air/water	21/10 C (70/50 F)	32/21 C (90/70 F)			
Air-cooled	186.1 kg (410 lb)	140.7 kg (310 lb)			
Energy consumption per 45.4 kg (100 lb) ice	N/A	6.0 kWh air-cooled			
Water consumption	45.4 L (12.0 gal) of potable water per 45.4 kg (100 lb) of ice				

#### Job

#### Item

# $Symphony\ Plus^{^{\mathsf{TM}}}\ \mathsf{ice}\ \mathsf{and}\ \mathsf{water}\ \mathsf{dispenser}$

C/E 12 CI series countertop with Chewblet® ice machine

#### **Features**

Narrow, 40.9 cm (16.12") width

5.4 kg (12 lb) ice storage capacity

Integral air-cooled ice machine with up to 186 kg (410 lb) daily production of Chewblet ice

- soft, chewable, compressed nugget ice is preferred over cubes¹ and is ideal for patient care
- New Quiet Night™ sleep mode turns off ice machine when idle

#### Designed with sanitation in mind

- New
- automatic self-flushing of ice machine removes impurities
- New
- drain cup provides internal air gap for added protection of food zone components from drain line contaminants
- Agion\* silver-based antimicrobial provides protection of key ice and water contact components²
- one-hand lever or SensorSAFE infrared ice dispense

#### Dependable design, easy to service and clean

New

- New cleaning and sanitizing of entire machine takes only 1 hour
  - LED control board provides at-a-glance machine status
  - panels are easily removed for accessibility to all components
  - ice machine parts are common across all Symphony Plus dispensers
  - stainless steel evaporator and auger deliver long life

#### Environmentally responsible

- R404a refrigerant has zero ozone depletion potential
- continuous ice making process uses less electricity and water

#### Durable, attractive dispenser

- stainless steel cabinet with accent trim
- poly drain pan, grille and dispenser lid are corrosion-resistant

#### Easy installation

- comes fully assembled and installs with three easy connections – electric, water and drain

#### Warranty

- 3 years parts and labor, 5 years compressor parts<sup>3</sup>

### Accessories

Base stand with or without factory installed water filter (refer to form# 7010)

10.16 cm (4.00") leg kit (item# AF10LBLEGS)

Pressurized water sanitizing kits (refer to form# 6830)

Water filters (refer to form# 9905)

Additional Symphony Plus accessories (refer to price list)

Follett Europe Polska Sp. z o.o. Mokry Dwór 26C 83-021 Wiślina, Poland +48 (58) 785-6140 | Fax: +48 (58) 785-6159 folletteurope.com


801 Church Lane | Easton, PA 18040, USA 1.610.252.7301 | Fax: +1.610.250.0696 | follettice.com




#### Specification Ice storage capacity 5.4 kg (12 lb) W1 Width 40.9 cm (16.12") W2 Width, base stand accessory 44.4 cm (17.5") **D1** Depth, entire dispenser 59.7 cm (23.50") D2 Depth, drain pan 13.97 cm (5.50") D3 Depth, base stand accessory 55.9 cm (22.00") H1 Height, dispenser 82.6 cm (32.50") **H2** Dispense height clearance 23.83 cm (9.38") H3 Height, base stand accessory 83.8 cm (33.00") 15.24 cm (6.00") top and right side Ventilation clearance Service clearance 30.5 cm (12.00") top Utility connection location through back or bottom C1 220 V/60/1 ("C" models) / 5.5 amps, 0.8 kW 230 V/50/1 ("E" models) 2.4 m (8') cord only electrical 3/8" FPT **C2** Potable water inlet C3 Drain 3/4" MPT 10 - 38 C (50 - 100 F) Air temperature Water temperature 7 - 32 C (45 - 90 F) Water pressure 69 - 483 kpa (10 - 70 psi) Heat rejection 5000 BTU/hr Approximate net weight 65 kg (144 lb) Approximate ship weight 90 kg (199 lb) Approximate ship weight, 36 kg (80 lb) base stand accessory NOTE: For indoor use only

SHORT FORM SPECIFICATION: (Choose one) \_\_\_ Ice and water or \_\_\_ ice-only dispenser to be Follett® automatic load in countertop configuration, with 5.4 kg (12 lb) of storage and separate ice and water chutes. Environmentally responsible R404a air-cooled ice machine to have 24 hour production capacity of approximately 186 kg (410 lb) of Chewblet compressed nugget ice at water temp. of 21 C (70 F); air temp. of 10 C (50 F). Ice machine equipped with automatic self-flushing and Quiet Night sleep mode. Dispenser to have automatic bin level control to start and stop ice machine. Storage area insulated with non-CFC, high density, foamed-in-place polyurethane. 2.4 m (8') cord only. 230 V models CE and EU food contact compliant.

## Dimensional drawing

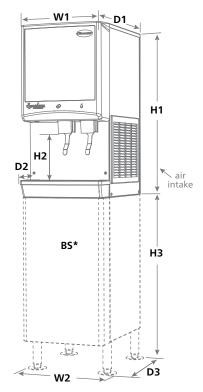



**BS\***– Base stand sold separately; measurements shown are with base stand legs at lowest position.

Note: See dispenser detail sheet, form# 6675, for counter cutouts.

- Independent third party studies. Contact Follett for details.
- Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice. Refer to price list for additional warranty information.

Agion is a registered trademark of Sciessent LLC.

Symphony Plus, SensorSAFE, and Quiet Night are trademarks of Follett LLC.

Chewblet and Follett are registered trademarks of Follett LLC, registered in the US.

Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

Follett Europe Polska Sp. z o.o. Mokry Dwór 26C 83-021 Wiślina, Poland +48 (58) 785-6140 | Fax: +48 (58) 785-6159 folletteurope.com



