



C15 Series ice and water dispenser with Chewblet® ice machine

countertop and freestanding

Features

Compact footprint, only 37.1 cm (14.62") W x 59.7 cm (23.50") D

6.8 kg (15 lb) ice storage capacity

Integral air-cooled ice machine with up to 56.7 kg (125 lb) daily production of popular Chewblet ice

- designed to make up to 400 servings per day¹
- soft, chewable, compressed nugget ice is preferred over cubes²
- environmentally responsible R134a refrigerant with zero ozone depletion potential
- energy saving sleep mode
- quiet production without noisy harvest cycles

Durable, attractive dispenser

- modern styling, stainless steel exterior with accent trim
- dispense-activated soft blue light illuminates point-of-use
- easy-to-clean, removable 591 ml (20 oz) drip tray
- dispenser top can support 15.9 kg (35 lb)

Designed with sanitation in mind

- Agion® silver-based antimicrobial product protection of key ice and water contact components³
- capacitive touch dispensing eliminates direct user contact with ice
- accommodates cups up to 22.4 cm (8.80") tall

Installation

- two easy connections – electric and water
- drainless design allows dispenser to be placed anywhere a water line can be run and eliminates the cost of a drain installation

Warranty

- 2 years parts, 5 years compressor parts

Accessories

- Base stand for converting countertop models (item# 00956292)
- 10.16 cm (4.00") leg kit for CI - countertop models (item# 00956300)
- 15.24 cm (6.00") leg kit for FS - freestanding models (item# 00956318)
- Drip tray drain kit for countertop models (includes 10.16 cm (4.00") legs) (item# 00981977)
- Drip tray drain kit for freestanding models (item# 00956375)
- Cartridge, replacement 5 micron particle/carbon (item# 00968107)
- Claris® hardness removal filtration system (item# 00986059)

NOTE: For use in applications with greater than 5mg/l but less than 400 mg/l total dissolved solids in water and less than 200 mg/l hardness (either naturally occurring or treated with reverse osmosis or other TDS reducing technology).
Not recommended for use with softened water.

220 V 60 Hz – ice and water dispensers			
Ice storage capacity	Configuration	Filter ¹	Item number
6.8 kg (15 lb)	countertop ice and water	no filter	C15CI100A-IW-NF-ST-00
		internal	C15CI100A-IW-CF-ST-00
	freestanding ice and water	no filter	C15FS100A-IW-NF-ST-00
		internal	C15FS100A-IW-CF-ST-00
	countertop ice-only	no filter	C15CI100A-NW-NF-ST-00
		internal	C15CI100A-NW-CF-ST-00
	freestanding ice-only	no filter	C15FS100A-NW-NF-ST-00
		internal	C15FS100A-NW-CF-ST-00

¹ Internal filter is a 5 micron particle and carbon filter.

Job

Item

Follett Europe Polska Sp. z o.o.
Mokry Dwór 26C 83-021 Wiślina, Poland
Phone: +48 (58) 785-6140 | Fax: +48 (58) 785-6159
folletteurope.com

801 Church Lane | Easton, PA 18040, USA
1.610.252.7301 | Fax: +1.610.250.0696 | follettice.com

FOLLETT®


Specification

Ice storage capacity	6.8 kg (15 lb)
W1 Width	37.1 cm (14.62")
D1 Depth of bottom	56.2 cm (22.12")
D2 Depth of top	59.7 cm (23.50")
H1 Height – countertop models	57.2 cm (22.50")
H2 Height – freestanding models	119.4 cm (47.00")
H3 Height, base stand	62.2 cm (24.50")
H4 Dispense height clearance	22.40 cm (8.80")
Ventilation clearance	7.62 cm (3.00") on each side
Service clearance	7.62 cm (3.00") behind and on each side
C1 220 V/60/1 electrical	5 amps. Connect to dedicated 10 amp circuit, fuse or breaker. Dispenser has IEC 60320-C13 connector in rear of dispenser for use with appropriate modular cord.
C2 Water inlet	1/4" MPT
Air temperature	10 - 38 C (50 - 100 F)
Water temperature	4 - 32 C (40 - 90 F)
Water pressure	69 - 482 kpa (10 - 70 psi)
Ice production at 21 C (70 F) air and 10 C (50 F) water	56.7 kg (125 lb) /day
Ice production at 32 C (90 F) air and 21 C (70 F) water	45.4 kg (100 lb) /day
Energy consumption 32 C (90 F) air and 21 C (70 F) water	6.9 kWh per 45.4 kg (100 lb) of ice
Heat rejection	1700 BTU/hr
Water consumption	45.4 L (12 gal) of potable water per 45.4 kg (100 lb) of ice
Approximate net weight – countertop models	43 kg (95 lb)
Approximate shipping weight – countertop models	46 kg (100 lb)
Approximate net weight – freestanding models	54 kg (119 lb)
Approximate shipping weight – freestanding models	62 kg (135 lb)

NOTE: For indoor use only. Designed for commercial use. Follett is not able to provide in-house services for residential installations.

SHORT FORM SPECIFICATION: (Choose one) ____ Ice and water or ____ ice-only dispenser to be Follett® automatic load in (choose one) ____ countertop or ____ freestanding configuration, with 6.8 kg (15 lb) of storage. Environmentally responsible R134a ice machine to be air-cooled. Ice machine to produce approximately 56.7 kg (125 lb) of Chewblet compressed nugget ice at air temperature of 21 C (70 F) and water temperature of 10 C (50 F). Ice machine to be equipped with printed circuit board and diagnostics to allow simplified servicing and with capacitive touch user interface. Storage area to be insulated with non-CFC, high density foam-in-place polyurethane. 220 V/60/1. Dispenser has IEC 60320-C13 connector in rear of dispenser for use with appropriate modular cord. NSF listed. Total dissolved solids in water not to exceed 400 mg/l (ppm) and hardness not to exceed 200 mg/l (ppm).

Dimensional drawing

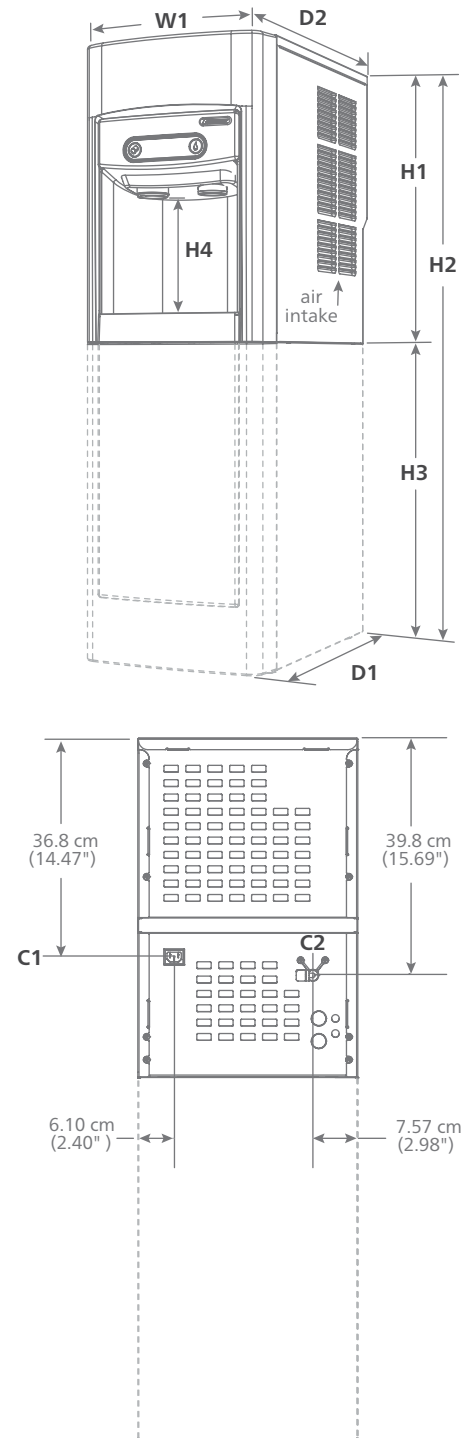

- 1 355 ml (12 oz) cups, 1/3 full of ice.
- 2 Independent third party studies. Contact Follett for details.
- 3 Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice.

Clarix is a registered trademark of the Aquis GmbH in Switzerland.

Agion is a registered trademark of Sciessent LLC.

Chewblet and Follett are registered trademarks of Follett LLC, registered in the US.

Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

C15 Series countertop and freestanding