

# FZR5PLP-T Performance Plus

plasma undercounter freezer



## Features

### Superior temperature performance

- custom-designed microprocessor temperature controller
- air-cooled refrigeration system with heavy duty 1/4 horsepower compressor
- environmentally friendly, non-CFC R404a refrigerant
- programmed automatic defrost every 6 hours
- cabinet-wide temperature remains within  $\pm 1$  C (1.8 F), even with frequent door openings

### Convenience and security

- fits below 36.00" (91.4 cm) standard countertops without casters
- refrigeration system settings accessed through door-mounted controls
- 7" LCD capacitive touchscreen digital temperature display available in user-programmable C or F with choice of product or air temperature
- integral event and data logging with easy downloading via convenient USB port
- user-programmable audible and visual high/low alarms
- mechanical lock – mounted on side of door
- lockable controller so setpoints cannot be inadvertently changed
- dry (NO and NC) contacts for connection to remote alarm systems
- temperature surveillance module (7 day analog chart recorder)
- flexible internal storage configuration (drawers and shelves interchangeable)
- lighted cabinet
- Agion® antimicrobial and UV product protection added to molded plastic façade<sup>1</sup>

### Durability and serviceability

- stainless steel construction on exterior and interior
- two full extension stainless steel drawers standard
- back wall evaporator and front ventilation (no top, back or side clearance required)
- heavy-duty edge-mount self-closing hinges
- field-reversible solid stainless steel door
- integral handle and magnetic gasket door closure

### Warranty

- 2 year parts and labor on refrigeration system
- 5 year parts on compressor

<sup>1</sup> Disclaimer: Antimicrobial protection is limited to the plastic façade.

## Model configurations

Controls	Keypad	V/Hz/Ph	Item number
<b>7" LCD touchscreen</b>	No	115/60/1	<b>FZR5PLP-T-00-00</b>
	Yes	115/60/1	<b>FZR5PLP-T-KP-00</b>

## Options and accessories

Keypad and electronic lock  
Shelf (item# 01059484)  
Replacement charts for temperature surveillance module (item# 00162099)  
Replacement pens for temperature surveillance module (item# 00162081)  
Universal automated medication dispensing system bracket (item# 01059096)  
Glycerine, 16 oz (item# 00959296)  
Stacking kit – Performance Plus on Performance Plus (item# 01054006)  
Stacking kit – REF/FZR Series (Legacy) on Performance Plus (item# 01067172)  
Temperature alarm (item# 00112185)  
17.00" (43.2 cm) pedestal kit (item# 01059120)  
Extra key (item# 01059112)  
Casters (set of 4) (item# 01053636)  
Seismic bracket kit (item# 01059104)

Job

Item

801 Church Lane | Easton, PA 18040, USA  
1.800.523.9361 | 1.610.252.7301 | folletthealthcare.com



## Specification

Nominal capacity	4.5 cu ft (127 L) / (40) 300 ml plasma packs
Ventilation clearance	0.0" for top, side and back clearance

## Exterior

<b>W1</b> Width	23.75" (60.3 cm)
<b>D1</b> Depth cabinet	25.62" (64.9 cm)
Depth with façade	27.00" (68.6 cm)
<b>H1</b> Height	34.00" (86.4 cm)
Height with casters	36.50" (92.7 cm)
Door swing	field-reversible

## Interior

Width	19.75" (50.2 cm)
Depth	18.32" (46.5 cm)
Height	21.54" (54.7 cm)
Storage system	(2) full extension stainless steel drawers 18.00" x 14.50" x 3.00" (45.7 cm x 36.8 cm x 7.62 cm)

## Door configurations

Door	solid, foamed stainless 21.50" x 22.51" x 1.63" (54.6 cm x 57.2 cm x 4.0 cm)
Door lock	cylinder lock
Door handle	molded into front façade
Door hinges	edge-mount, self-closing
Gasket	magnetic

## Electrical

<b>C1</b> 115 V/60/1 electrical	7.1 run load amps, NEMA 5-15P 90° hospital-grade plug PVC, SJT, 16GA, 7' (2.1 m) cord
---------------------------------	------------------------------------------------------------------------------------------

## Controls

Temperature display	7" capacitive touchscreen
<b>C2</b> 3rd party probe access	rear access port
Factory preset	-30.5 C
Date and time	programmable
Controller security	choose "on" or "off" — 4 digit password to prevent interface setting/selection changes
Product simulation bottle	(1) 125 ml
Programmable operating range	-37.2 to -17.8 C (-35 to 0 F)

## Alarming

High and low product temperature alarm	audible and visual, user programmable setpoints in C or F
Probe error alarm	audible and visual — product temperature probes, refrigeration and defrost
Alarm mute	user selectable
Alarm volume	0 -10 adjustable
Min/max temperature log	shows highest and lowest product temperature since last reset occurred
Remote contacts	NO/NC standard, located on back

## System performance

Refrigerant and charge	R404a refrigerant, 10 oz
Energy consumption	5.8 kWh/day
Max heat rejection	2157 BTU/hr


## Shipping

Approximate net weight	170 lb (77 kg)
Approximate ship weight	205 lb (93 kg)

NOTE: For indoor use only

**SHORT FORM SPECIFICATION:** Performance Plus plasma freezer for freestanding or undercounter use, fits under 36.00" (91.4 cm) standard height counter with 4.5 cubic feet (127 L) of nominal capacity. Includes (2) full extension stainless steel drawers which store up to (40) 300 ml plasma packs. Environmentally responsible R404a forced-air cooled refrigeration system. Top-mounted controls with LCD touchscreen display product or air temperature in user-selectable C or F. Event and data logging with USB download capability. Integral high and low temperature alarming. 7-day analog chart recorder. Storage area insulated with CFC-free, high-density polyurethane foam. 7' (2.1 m) power cord with NEMA 5-15P 90° hospital-grade plug. NSF, UL and CUL listed.

## Dimensional drawing

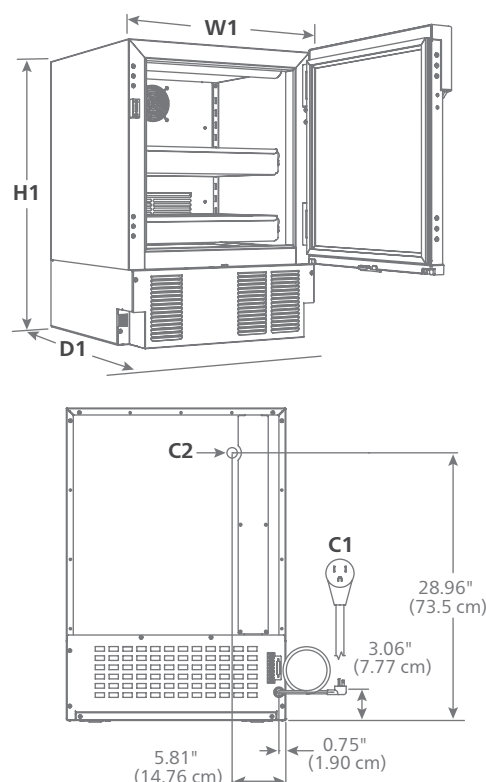

Agion is a registered trademark of Sciessent LLC.  
FOLLETT HEALTHCARE is a trademark of Follett LLC.  
FOLLETT is a registered trademark of Follett LLC, registered in the US.  
Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

## FZR5PLP-T undercounter plasma freezer