

# Ice Pro™ DB1000 Series

## automatic ice bagging and dispensing system



### Features

#### Fast, labor saving ice dispense

- store up to 1000 lb (454 kg) of ice
- eliminates the need to shovel or scoop ice from bin
- fill up to 8 x 8 lb (3.6 kg) bags a minute
- automatic agitation cycle prevents ice from forming bridges
- foot pedal and push-button actuation automatically dispenses ice at a rate of up to 120 lb (55 kg) per minute

#### Fresher ice

- first ice in is first ice out

#### Ice compatibility

- dispenses most cube ice up to 1.00" (2.54 cm) and customer-preferred Chewblet® ice into most carts and containers

#### Durable, user-friendly construction

- bag stand adjusts to fit up to 20 lb (9 kg) ice bags and can be used to fill containers such as Totes™ ice carrier or small ice coolers
- bag stand removes to fit carts or coolers up to 29.50" (74.9 cm) tall
- corrosion-resistant poly bin
- dispensing components are easily removed for cleaning
- removable, lockable clear window prevents unauthorized access to ice and provides full access for cleaning
- access from front and side for maintenance
- bag holder pins quickly adjust for use with wire-wicket ice bags with 5.00" (12.7 cm) to 10.00" (25.4 cm) holes on center
- easy-to-use controls with adjustable time dispense and blower to open bags automatically

#### Warranty

- 2 years parts and labor
- 3rd party ice machines must be installed and operated in accordance with the manufacturer's instructions
- visit [follettice.com](http://follettice.com) for complete warranty details

#### Includes:

- 125 x 8 lb (3.6 kg) ice bags and reorder information
- bag stand
- cleaning brush and bracket

#### Certifications (applied to all products unless otherwise noted)

- DB1000SA



<sup>1</sup> Certifications do not apply to options and accessories.

## Specification

Maximum bin capacity <sup>1</sup>	1000 lb (454 kg)
Cubic capacity	33.3 cu ft (0.94 cu m)
<b>W1</b> Width	52.00" (132.1 cm)
<b>W2</b> Width, bin top	49.12" (124.8 cm)
<b>D1</b> Depth, bin top	33.75" (85.7 cm)
<b>D2</b> Depth, bin with cover	45.50" (115.6 cm)
<b>D3</b> Depth, bin with bag stand	46.75" (118.7 cm)
<b>H1</b> Height <sup>2</sup>	71.75" (182.2 cm) adjustable
<b>W3</b> Drip tray width	16.75" (42.5 cm)
<b>D4</b> Drip tray depth	10.12" (25.7 cm)
<b>D5</b> Depth, bin without cover	34.00" (86.4 cm)
<b>B1</b> Dispense clearance	31.00" (78.7 cm)
<b>B2</b> Bag stand dispense clearance	27.38" (69.5 cm)
Installation clearance	34.25" (87.0 cm) wide door access
Service clearance	12.00" (30.5 cm) left side
<b>C1</b> Electrical	15 amps. 7' (2.1 m) cord with NEMA 6-15 plug.
220 V/60/1	
<b>C2</b> Electrical	5 amps, max. fuse 15 amps. Cord only. Wire in accordance with all local codes.
230 V/50/1	
<b>L1</b> Drain <sup>3</sup>	1.00" FPT
Dispense rate	up to 120 lb (55 kg) per minute
Ice compatibility	Cube and Chewblet ice NOTE: Dispensing Chewblet ice requires removal of the Horizon Elite Chewblet breaker. Refer to instruction 01564053.
Shipping weight	704 lb (319 kg)

NOTES: For indoor use only


SHORT FORM SPECIFICATION (Choose one): Automatic ice storage and dispensing system to be Follett \_\_\_\_\_ 220 V/60 Hz DB1000SA or \_\_\_\_\_ 230 V/50 Hz EDB1000SA with elevated bin and base. Bin to hold up to 1000 lb (454 kg) of ice. Dispense rate to be approximately 120 lb (55 kg)/min. Two position ice discharge chute with selector lever allows filling of bags or other containers. Lockable clear inspection window shall have interlock switch to prevent operation if window is removed. Hopper to be constructed of double wall rotationally molded polyethylene insulated with CARB compliant non-HFC foam. Heavy-duty agitation system includes two stainless steel agitators and motors. Dispense auger to be rotationally molded plastic, driven by 1/4 HP motor. Activation of the dispensing function shall be controlled by push-button and foot pedal. Dispenser shall be equipped with holding pins for bags, time dispense, and blower function for automatically opening bags. DB1000SA is NSF, UL and cUL listed.

### Notes:

- 1 Computed on cubic volume of bin. Does not reflect voids that can occur due to pyramiding.
- 2 Special top required for ice machines weighing more than 800 lb (363 kg). Add 2.12" (5.40 cm) to height. Contact factory.
- 3 Follett recommends installation of a floor drain with grate with all ice storage bins.

Local food regulations vary. Please check with your local authorities for requirements for packaged ice.

## Dimensional drawing

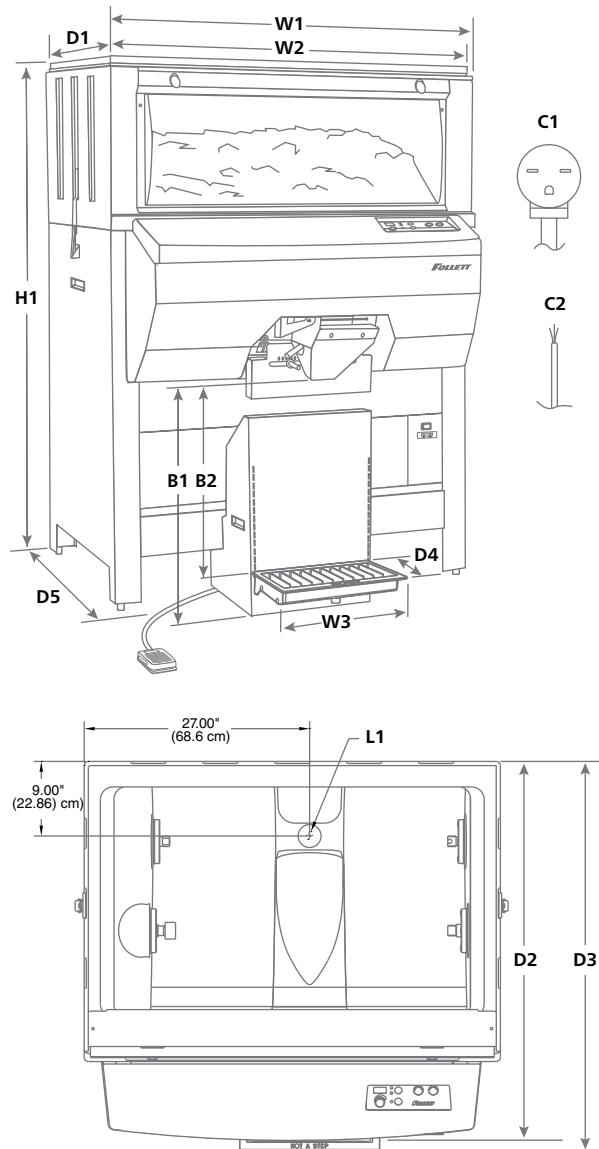

Bostitch is a registered trademark of Stanley Black and Decker.  
ICE PRO and TOTES are trademarks of Follett Products, LLC.  
CHEWBLET and FOLLETT are registered trademarks of Follett Products, LLC, registered in the US.  
Follett reserves the right to change specifications at any time without obligation.  
Certifications may vary depending on country of origin.