

# Undercounter refrigerators

## vaccine storage



REFVAC5P-OR-00-00

REFVAC5P-TR-00-00

Model configurations			
Controls	Hinge location <sup>1</sup>	Door configuration	Item number
<b>LED</b>	right	stainless	<b>REFVAC4P-OR-00-00</b>
			<b>REFVAC5P-OR-00-00</b>
<b>7" LCD touchscreen</b>	right	stainless	<b>REFVAC4P-TR-00-00</b>
			<b>REFVAC5P-TR-00-00</b>

<sup>1</sup> As facing the unit.

## Options and accessories

Replacement NTC probe with NIST-traceable certificate of calibration (item# 01077841)

Extra shelf (1) (item# 01059484)

Temperature surveillance module (includes alarm, 6.00" (15.24 cm) chart recorder, remote contacts) (item# 00168674)

Universal ADC-compatible bracket (for all medication dispensing system locks) (item# 01059096)

Glycerine, 16 oz (item# 00959296)

Stacking kit (Performance Plus on Performance Plus) (item# 01054006)

Stacking kit (REF/FZR Series on Performance Plus) (item# 01067172)

Temperature alarm with dry contacts for remote alarming (item# 00112185)

Pedestal base, 23.75" wide x 24.00" deep x 17.00" high (60.3 x 61.0 x 43.2 cm), stainless (item# 01059120)

Casters (set of 4 with spacers) (item# 01053636)

Wall mount kit (item# 00153700)

Seismic bracket kit (item# 01059104)

NO/NC dry contacts for connection to remote alarm systems (item# 01092022) (standard on touchscreen model)

## Features

Certified to meet NSF 456 standard for vaccine storage

Superior temperature performance

- custom-designed microprocessor temperature controller
- air-cooled refrigeration system with heavy duty 1/5 hp compressor
- environmentally friendly, non-CFC R134a refrigerant
- programmed automatic defrost every 8 hours
- cabinet-wide temperature remains within  $\pm 1$  C (1.8 F), even with frequent door openings

Convenience and security

- REFVAC4P fits below 34.00" (86.4 cm) ADA countertops and REFVAC5P fits below 36.00" (91.4 cm) standard countertops without casters
- refrigeration system settings accessed through door-mounted controls
- exterior digital temperature display available in user-programmable C or F with choice of product or air temperature
  - LED on REFVAC4P/REFVAC5P-OR-00-00
  - 7" LCD capacitive touchscreen on REFVAC4P/REFVAC5P-TR-00-00
- ships with certificate of NIST-traceable calibration for alarm probe
- integral event and data logging with easy downloading via convenient USB port on touchscreen models
- user-programmable audible and visual high/low alarms
- mechanical lock – mounted on side of door
- lockable controller so set points cannot be inadvertently changed
- dry (NO and NC) contacts for connection to remote alarm systems (standard on touchscreen model)
- Agion<sup>®</sup> antimicrobial and UV product protection added to molded plastic façade<sup>1</sup>

Durability and serviceability

- stainless steel construction on exterior and interior
- two epoxy-coated wire shelves standard
- back wall evaporator and front ventilation (no top, back or side clearance required)
- heavy-duty edge-mount self-closing hinges
- right-hinged door with integral handle and magnetic gasket door closure provides ease-of-use

Warranty

- 2 year parts and labor
- 5 year compressor parts only
- optional extended one year warranty (item# EW12)
  - 3 year parts and labor
  - 5 year compressor parts only
- optional extended three year warranty (item# EW36)
  - 5 year parts and labor

Certifications



Vaccine Refrigerator  
NSF 456 – E524732  
Commercial Refrigerator  
SAFETY US/CA – SA12646

<sup>1</sup> Disclaimer: Antimicrobial protection is limited to the plastic façade.

## Specification

Nominal capacity	REFVAC4P – 3.9 cu ft (110 L) REFVAC5P – 4.5 cu ft (127 L)
Vaccine storage capacity	REFVAC4P – 2.65 cu ft (75 L) REFVAC5P – 3.04 cu ft (86 L)
Ventilation clearance	0.0" for top, side and back clearance

## Exterior

<b>W1</b> Width	23.75" (60.3 cm)
<b>D1</b> Depth cabinet	25.62" (65.1 cm)
Depth with façade	27.00" (68.6 cm)
<b>H1</b> Height	REFVAC4P – 31.38" (79.7 cm) REFVAC5P – 34.00" (86.4 cm)
Height with casters	REFVAC4P – 33.88" (86.1 cm) REFVAC5P – 36.50" (92.7 cm)
Door swing	24.00" (61.0 cm) from front of cabinet, 180° from closed

## Interior

Width	19.75" (50.2 cm)
Depth	18.32" (46.5 cm)
Height	REFVAC4P – 18.94" (48.1 cm) REFVAC5P – 21.54" (54.7 cm)
Storage system	(2) 18.10" x 19.10" (46.0 x 48.5 cm) epoxy-coated steel shelves

## Door configurations

Door	solid, foamed stainless 21.50" x 22.51" x 1.63" (54.6 x 57.2 x 4.0 cm)
Door lock	cylinder lock
Door handle	molded into front façade
Door hinges	edge-mount, self-closing
Gasket	magnetic

## Electrical

<b>C1</b> 115 V/60/1 electrical	4.1 run load amps, NEMA 5-15P 90° hospital-grade plug. PVC, SJT, 16GA, 7' (2.1 m) cord.
Maximum size of branch circuit overcurrent device	15 amps dedicated circuit

## Controls

Temperature display	7 segment LED on basic model or 7" capacitive touchscreen on touchscreen model
<b>C2</b> 3rd party probe access	rear access port
Factory preset	6 C
Date and time	programmable on touchscreen model
Controller security	choose "on" or "off" — 4 digit password to prevent interface setting/selection changes on touchscreen model
Product simulation bottle	(1) 60 ml
Programmable operating range	2.2 to 10 C (36 to 50 F)

## Alarming

High and low product temperature alarm	audible and visual, user programmable set points in C or F
Probe error alarm	audible and visual — product temperature probes, refrigeration and defrost
Alarm mute	user selectable
Alarm volume	0 - 10 adjustable
Min/max temperature log	shows highest and lowest product temperature since last reset occurred

## NSF 456 certified vaccine refrigerator

9055-202303 | © Follett Products, LLC

Remote contacts	NO/NC located on back of touchscreen models
-----------------	--

## System performance

Refrigerant and charge	R134a refrigerant, 7.5 oz
Energy consumption	1.8 kWh/day
Nominal heat rejection <sup>1</sup>	415 BTU/hr (122 W)
Max heat rejection	2185 BTU/hr (640 W)


## Shipping

Approximate net weight	170 lb (77 kg)
Approximate ship weight	205 lb (93 kg)

NOTE: For indoor use only

SHORT FORM SPECIFICATION: NSF/ANSI 456-certified vaccine refrigerators (choose one) with \_\_\_ 3.9 cu ft (110 L) of nominal capacity and fits under 34.00" (86.4 cm) ADA-height counter or \_\_\_ 4.5 cu ft (127 L) of nominal capacity and fits under 36.00" (91.4 cm) standard counter height. Performance Plus undercounter refrigerator with solid stainless steel includes (2) epoxy-coated wire shelves, adjustable in 1.50" (3.81 cm) increments. Environmentally responsible R134a forced-air cooled refrigeration system. Top-mounted controls display product or air temperature in user-selectable C or F. Integral high and low temperature alarming. Storage area insulated with CARB compliant non-HFC foam. 7' (2.1 m) power cord with NEMA 5-15P 90° hospital-grade plug. UL listed.

## Dimensional drawing

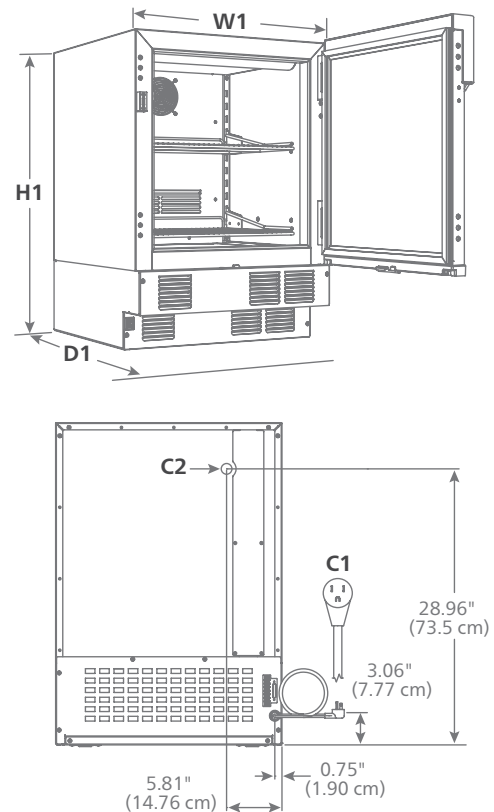

<sup>1</sup> Nominal heat rejection means heat rejection from a refrigerator in a 75 F (24 C) ambient with proper ventilation, an empty cabinet, default settings, default defrost schedules/durations, and nominal supply 115-120 VAC.

Agion is a registered trademark of Sciesent LLC.  
FOLLETT and FOLLETT HEALTHCARE are registered trademarks of Follett Products, LLC, registered in the US.  
Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

801 Church Lane | Easton, PA 18040, USA  
1.800.523.9361 | 1.610.252.7301 | folletthealthcare.com

**FOLLETT**  
HEALTHCARE®